



LNP-0500G-bt Series

5-Port Industrial Gigabit IEEE 802.3bt PoE++ Unmanaged Ethernet Switch, with 4*10/100/1000Tx (90W/Port) and 1*10/100/1000Tx



User Manual

Version 1.0



© Copyright 2020 Antaira Technologies, LLC

All Rights Reserved

This document contains information, which is protected by copyright. Reproduction, adaptation or translation without prior permission is prohibited, except as allowed under the copyright laws.

Trademark Information

Antaira is a registered trademark of Antaira Technologies, LLC, Microsoft Windows and the Windows logo are the trademarks of Microsoft Corp. NetWare is the registered trademark of Novell Inc. WMM and WPA are the registered trademarks of Wi-Fi Alliance. All other brand and product names are trademarks or registered trademarks of their respective owners.

Notice: Copyrights © 2020 by Antaira Technologies, LLC. All rights reserved. Reproduction, adaptation, or translation without prior permission of Antaira Technologies, LLC is prohibited, except as allowed under the copyright laws.

Disclaimer

Antaira Technologies, LLC provides this manual without warranty of any kind, expressed or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. Antaira Technologies, LLC may make improvements and/or changes to the product and/or specifications of the product described in this manual, without prior notice. Antaira Technologies, LLC will not be liable for any technical inaccuracies or typographical errors found in this guide. Changes are periodically made to the information contained herein and will be incorporated into later versions of the manual. The information contained is subject to change without prior notice.

FCC Notice

This equipment has been tested and found to comply with the limits for a Class-A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy. It may cause harmful interference to radio communications if the equipment is not installed and used in accordance with the instructions. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

CE Mark Warning

This is a Class-A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Industrial Ethernet Switches

Industrial Grade Unmanaged Ethernet Switches

User Manual

Version 1.0 (June 2020)

This manual supports the following models:

- LNP-0500G-bt
- LNP-0500G-bt-T

This document is the current official release manual. Please check our website (www.antaira.com) for any updated manual or contact us by e-mail (support@antaira.com).

Table of Contents

1. Overview	1
1.1 Key Features.....	1
1.2 Package Contents.....	2
1.3 Safety Precaution.....	2
2. Hardware Description	3
2.1 Physical Dimensions	3
2.2 Front Panel	4
2.3 Top View.....	4
2.4 LED Indicators	5
2.5 Dip Switch.....	6
2.6 Ethernet Ports	6
2.7 Cabling.....	8
2.8 Wiring the Power Inputs	8
2.9 Wiring the Fault Alarm Contact.....	9
3. Mounting Installation	10
3.1 DIN-Rail Mounting.....	10
3.2 Wall Mounting	12
4. Hardware Installation	13
4.1 Installation Steps.....	13
5. Trouble Shooting	14
6. Technical Specifications	15

1. Overview

Antaira Technologies' LNP-0500G-bt series is an industrial gigabit PoE++ unmanaged Ethernet switch featuring 4*10/100/1000Tx PoE RJ45 ports and 1*10/100/1000Tx RJ45 port. Each PoE Ethernet port supports an IEEE 802.3bt with high power PoE++ output up to 90W per port, making it ideal for applications that demand a high power PoE power source within any harsh or outdoor environment.

The LNP-0500G-bt series is IP30 rated and DIN-rail mountable with two wide operating temperature models to support either a standard temperature range (STD: -10°C to 65°C), or an extended temperature range (EOT: -40°C to 75°C); as well as high EFT and ESD protection to prevent any unregulated voltage.

This product series provides a reliable hardened Ethernet connection with PoE functions for any outdoor or harsh industrial application environments, such as, security surveillance, ITS-traffic monitoring systems, oil/gas and mining, facility management for power/utility, water wastewater treatment plants, and lastly, automated production lines in factory automation.

1.1 Key Features

- System Interface/Performance
 - All RJ45 ports support the auto MDI/MDI-X function
 - Embedded 4*10/100/1000Tx (PSE: 90W/Port) and 1*10/100/1000Tx
 - Store-and-forward switching architecture
 - 8K MAC address table
 - Jumbo Frame Support up to 10.0K
 - Power line EFT protection: 2,000VDC; Ethernet ESD protection: 6,000VDC
- Power Input
 - DC 48~55V redundant power, with a 6-pin removal terminal block
- Operating Temperature
 - Standard operating temperature model: -10°C ~ 65°C
 - Extended operating temperature model (-T): -40°C ~ 75°C
- Case/Installation
 - IP30 protection
 - DIN-Rail and wall mount design

1.2 Package Contents

- 1 - LNP-0500G-bt(-T)
- 1 - Quick Installation Guide
- 2 - Wall mounting brackets and screws
- 1 - DC cable –18 AWG & DC jack 5.5x2.1mm

1.3 Safety Precaution

Attention: If the DC voltage is supplied by an external circuit, please use a protection device on the power supply input. The industrial Ethernet switch's hardware specs, ports, cabling information, and wiring installation will be described within this user manual.

2. Hardware Description

2.1 Physical Dimensions

Figure 2.1, below, shows the physical dimensions of Antaira Technologies' LNP-0500G-bt series:

(W x D x H) is 54mm x 99mm x 142mm

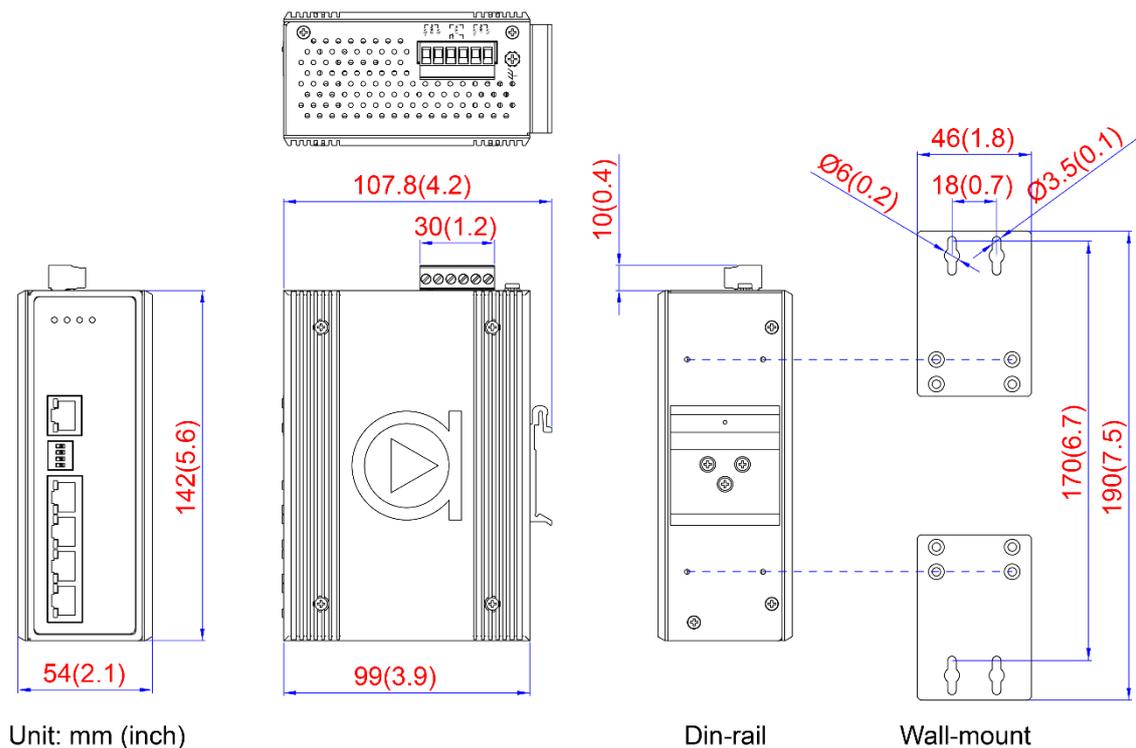


Figure 2.1

LNP-0500G-bt Series Physical Dimensions

2.2 Front Panel

The front panel of the LNP-0500G-bt series:

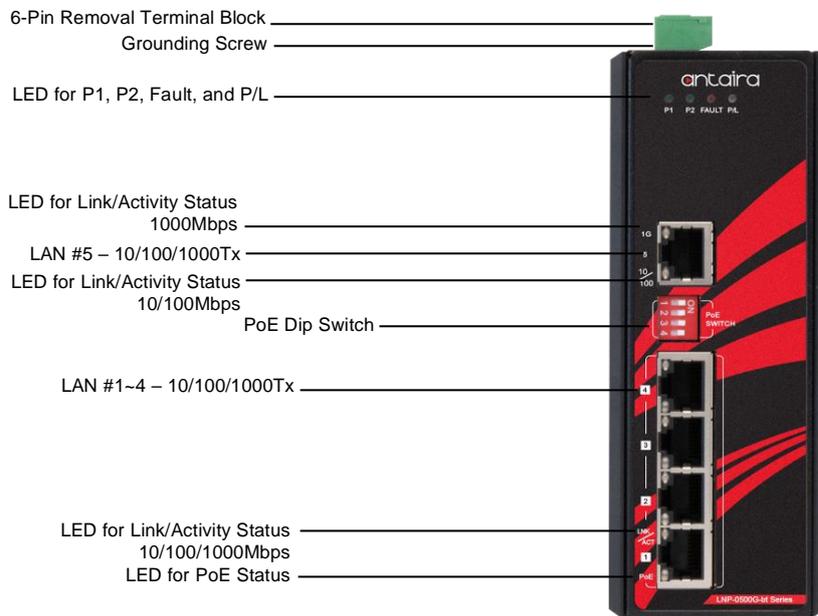


Figure 2.2 - Front Panel of the LNP-0500G-bt Series

2.3 Top View

Figure 2.3, below, shows the top panel of the LNP-0500G-bt series switch that is equipped with one 6-pin removal terminal block connector for dual DC power inputs (48-55 VDC).

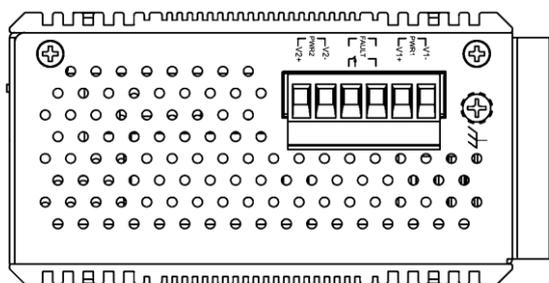


Figure 2.3

Top Panel View of LNP-0500G-bt Series

2.4 LED Indicators

There are LED light indicators located on the front panel of the industrial Ethernet switch that display the power status and network status. Each LED indicator has a different color and has its own specific meaning, see below in *Table 2.1*.

LED	Color	Description	
P1	Green	On	Power input 1 is active
		Off	Power input 1 is inactive
P2	Green	On	Power input 2 is active
		Off	Power input 2 is inactive
Fault	Red	On	Any of the listed trigger events occur, (will trigger relay) 1. Power 1 or Power 2 is inactive 2. Total PoE loading is > 100% PoE Budget 3. PoE over current (per port) 4. Cable short (per port) 5. One of the channels in Dual PD fail
		Off	No trigger events occur
PoE Load	Off	Off	The actual PoE Consumption of all connected working PDs budget was $\leq 50\%$
	Blue	On	The actual PoE Consumption of all connected working PDs budget was 51 ~ 70%
	Red	On	The actual PoE Consumption of all connected working PDs budget was 71 ~ 90%
		Blinking (1 time/s)	The actual PoE Consumption of all connected working PDs budget was 91 ~ 100%
LAN Port 1 ~ 4 (Upper LED)	 Green	On	Connected to network, 10/100/1000Mbps
		Blinking	Networking is active
		Off	Not connected to network
LAN Port 1 ~ 4 (Lower LED)	 Green	On	IEEE 802.3bt connection (Single Signature PD Class 5~8 / Dual Signature PD Channel Class 1~5)
		Off	No powered-device attached or power supplying fails

	 Amber	On	IEEE 802.3af/at connection (Single Signature PD Class 0~4)
		Off	No powered-device attached or power supplying fails
LAN Port 5 (Upper LED)	 Green	On	Connected to network, 1000Mbps
		Blinking	Networking is active
		Off	Not connected to network
LAN Port 5 (Lower LED)	 Green	On	Connected to network, 10/100Mbps
		Blinking	Networking is active
		Off	Not connected to network

Table 2.1

LED Indicators for LNP-0500G-bt Series

2.5 Dip Switch

The 4-pin Dip Switch on the front panel of the Ethernet Switch works as the PoE controller for PoE Port 1~4.

	ON	OFF
Dip Switch 1	Enable Port 1 PoE Function	Disable Port 1 PoE Function
Dip Switch 2	Enable Port 2 PoE Function	Disable Port 2 PoE Function
Dip Switch 3	Enable Port 3 PoE Function	Disable Port 3 PoE Function
Dip Switch 4	Enable Port 4 PoE Function	Disable Port 4 PoE Function

2.6 Ethernet Ports

■ RJ-45 Ports

RJ-45 Ports (Auto MDI/MDIX): The RJ-45 ports (LAN 1~5) are auto-sensing for 10/100/1000Base-T, or 100Base-Tx devices connections. Auto MDI/MDI-X means that the switch can connect to another switch or workstation without changing the straight-through or crossover cabling. See the figures shown below for straight-through and crossover cabling schematics.

■ **RJ-45 Pin Assignments (Table 2.2)**

Pin Number	Assignment
1	Rx+
2	Rx-
3	Tx+
6	Tx-

Table 2.2
RJ45 Pin Assignments

Note: The “+” and “-” signs represent the polarity of the wires that make up each wire pair.

All ports on this industrial Ethernet switch support automatic MDI operations. Users can use straight-through cables (see figure below) for all network connections to PCs, servers, and other switches or hubs. With straight-through cable, pins 1, 2, 3, and 6, at one end of the cable, are connected straight through to pins 1, 2, 3 and 6 at the other end of the cable. The table below (Table 2.3) shows the 10BASE-T/100BASE-TX/1000BASE-T MDI port pin outs.

Pin MDI-X	Signal Name	MDI Signal Name
1	Receive Data plus (RD+)	Transmit Data plus (TD+)
2	Receive Data minus (RD-)	Transmit Data minus (TD-)
3	Transmit Data plus (TD+)	Receive Data plus (RD+)
6	Transmit Data minus (TD-)	Receive Data minus (RD-)

Table 2.3
Ethernet Signal Pin Outs

The following figures show the cabling schematics for straight-through and crossover cables.

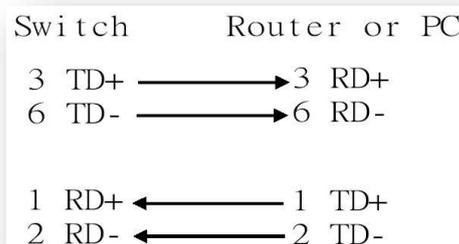


Figure 2.4 - Straight-Through Cables Schematic

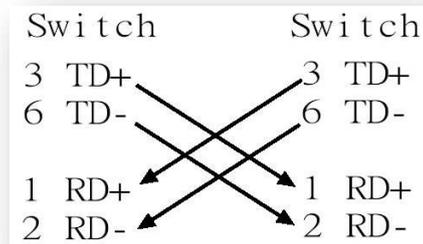


Figure 2.5 - Crossover Cables Schematic

2.7 Cabling

- Twisted-pair segments can be connected with an unshielded twisted pair (UTP) or shielded twisted pair (STP) cable. The cable must comply with the IEEE 802.3u 100Base TX standard (e.g. Category 5, 5e, or 6). The cable between the equipment and the link partner (switch, hub, workstation, etc.) must be less than 100 meters (328 ft.) long.

2.8 Wiring the Power Inputs

Please follow the below steps to insert the power wire.

1. Insert the positive and negative wires into the PWR1 (V1+, V1-) and PWR2 (V2+, V2-) contacts on the terminal block connector as shown below in *Figure 2.6*.

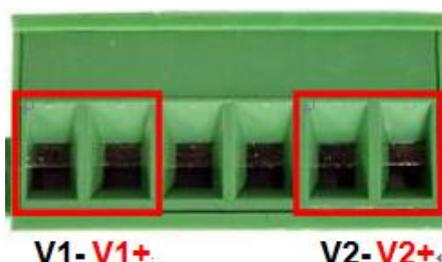


Figure 2.6

Power Terminal Block

2. Tighten the wire-clamp screws to prevent the wires from loosening, as shown below in *Figure 2.7*.

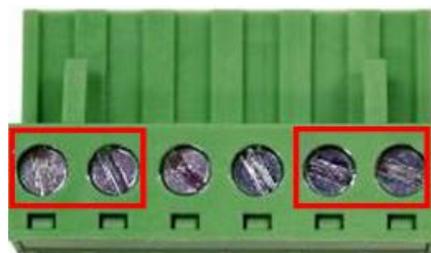


Figure 2.7

Power Terminal Block

****Note:**

- Only use copper conductors, **125° C**, tighten to **5 lbs.**
 - The wire gauge for the terminal block should range between **18~20 AWG**.
-

2.9 Wiring the Fault Alarm Contact

The fault alarm contact is in the middle of the terminal block connector as the picture shows below in *Figure 2.8*. By inserting the wires, it will detect the fault status including power failure or port link failure (managed industrial switch only) and form a normal open circuit. An example is shown below in *Figure 2.8*.

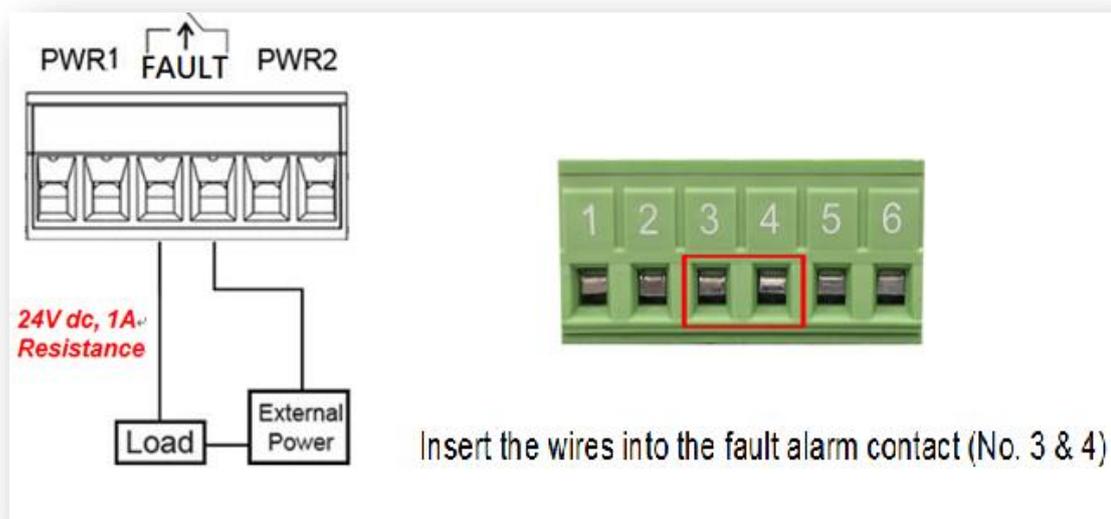


Figure 2.8

Wiring the Fault Alarm Contact

-
- **Note:**
- **The wire gauge for the terminal block should range between 12 ~ 24 AWG.**
 - **If only using one power source, jumper Pin 1 to Pin 5 and Pin 2 to Pin 6 to eliminate power fault alarm.**
-

3. Mounting Installation

3.1 DIN-Rail Mounting

The DIN-Rail is pre-installed on the industrial Ethernet switch from the factory. If the DIN-Rail is not on the industrial Ethernet switch, please refer to Figure 3.1 to learn how to install the DIN-Rail on the switch.

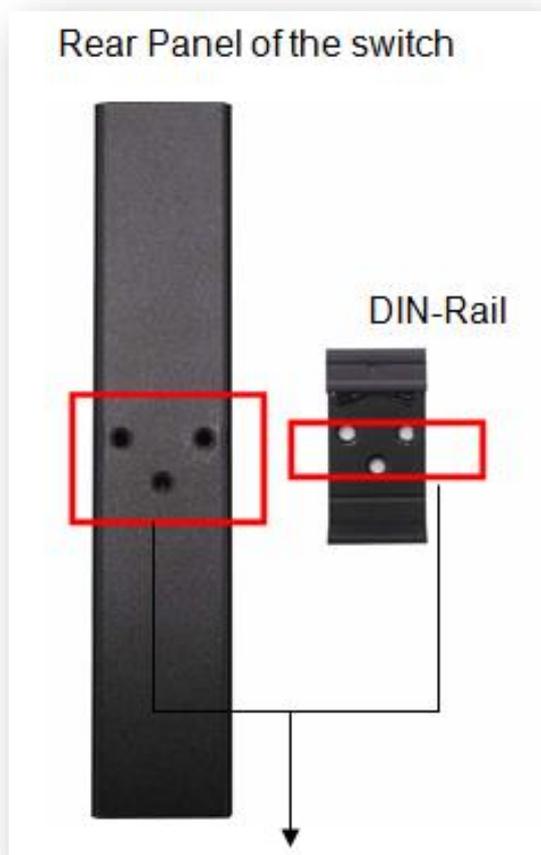


Figure 3.1

The Rear Side of the Switch and DIN-Rail Bracket

Follow the steps below to learn how to hang the industrial Ethernet switch.

1. Use the screws to install the DIN-Rail bracket on the rear side of the industrial Ethernet switch.
2. To remove the DIN-Rail bracket, do the opposite from step 1.
3. After the DIN-Rail bracket is installed on the rear side of the switch, insert the top of the DIN-Rail on to the track as shown below in *Figure 3.2*.



Figure 3.2

Insert the Switch on the DIN-Rail

4. Lightly pull down the bracket on to the rail as shown below in *Figure 3.3*.

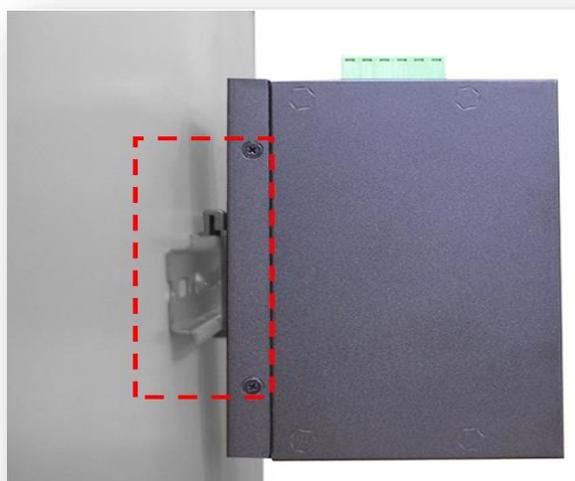


Figure 3.3

Stable the Switch on DIN-Rail

5. Check if the bracket is mounted tightly on the rail.
6. To remove the industrial Ethernet switch from the rail, do the opposite from the above steps.

3.2 Wall Mounting

Follow the steps below to mount the industrial Ethernet switch using the wall mounting bracket as shown below in *Figure 3.4*.

1. Remove the DIN-Rail bracket from the industrial Ethernet switch by loosening the screws.
2. Place the wall mounting brackets on the top and bottom of the industrial Ethernet switch.
3. Use the screws to screw the wall mounting bracket on the industrial Ethernet switch.
4. Use the hook holes at the corners of the wall mounting bracket to hang the industrial Ethernet switch on the wall.
5. To remove the wall mount bracket, do the opposite from the steps above.

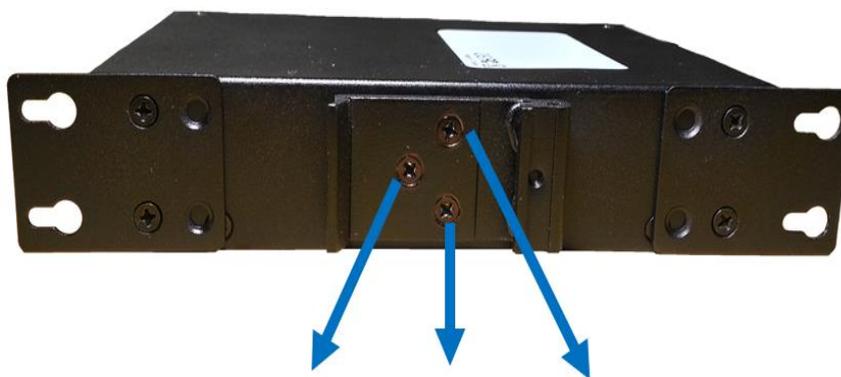


Figure 3.4

Remove DIN-Rail Bracket from the Switch

Below, in *Figure 3.5* are the dimensions of the wall mounting bracket.

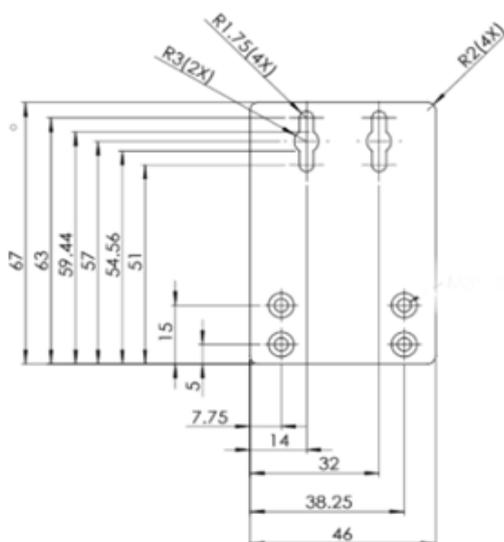


Figure 3.5

Wall Mounting Bracket Dimensions

4. Hardware Installation

4.1 Installation Steps

This section will explain how to install Antaira Technologies' LNP-0500G-bt(-T).

Installation Steps

1. Unpack the industrial Ethernet switch from the original packing box.
2. Check if the DIN-Rail bracket is screwed on the industrial Ethernet switch.
 - If the DIN-Rail is not screwed on the industrial Ethernet switch, please refer to the **DIN-Rail Mounting** section for DIN-Rail installation.
 - If there's requiring to wall mount the industrial Ethernet switch, please refer to the **Wall Mounting** section for wall mounting installation.
3. To hang the industrial Ethernet switch on a DIN-Rail or wall, please refer to the **Mounting Installation** section.
4. Power on the industrial Ethernet switch and then the power LED light will turn on.
 - For the help on how to wire power, please refer to the **Wiring the Power Inputs** section.
 - Please refer to the **LED Indicators** section for LED light indication.
5. Prepare the twisted-pair, straight-through category 5 cable for Ethernet connection.
6. Insert one side of the RJ-45 cable into switch's Ethernet port and on the other side into the networking device's Ethernet port, e.g. switch PC or server.
 - The Ethernet port's (RJ-45) LED on the industrial Ethernet switch will turn on when the cable is connected to the networking device.
 - Please refer to the **LED Indicators** section for LED light indication.
7. When all connections are set and the LED lights all show normal, the installation is complete.

5. Trouble Shooting

- Always verify to have the right power cord or adapter. Never use a power supply or adapter with a non-compliant DC output voltage or it will burn the equipment.
- Select the proper UTP or STP cable in order to construct the network. Use an unshielded twisted-pair (UTP) or shield twisted-pair (STP) cable for RJ-45 connections: 100Ω Category 5e for 10/100/1000Mbps. Also be sure that the length of any twisted-pair connection does not exceed 100 meters (328 feet).
- **Diagnosing LED Indicators:** To assist in identifying problems, the switch can be easily monitored with the LED indicators which help to identify if any problems exist.
 - Please refer to the LED Indicators section for LED light indication.
- If the power indicator LED does not turn on when the power cord is plugged in, the user may have a problem with the power cord. Check for loose power connections, power losses or surges at the power outlet.
 - Please contact Antaira for technical support service, if the problem still cannot be resolved.
- If the industrial switch LED indicators are normal and the connected cables are correct but the packets still cannot transmit, please check the system's Ethernet devices' configuration or status.

6. Technical Specifications

Table 6.1 has the technical specifications for Antaira Technologies LNP-0500G-bt series:

Standards	IEEE 802.3	10Base-T Ethernet
	IEEE 802.3u	100Base-Tx and 100Base-Fx Fast Ethernet
	IEEE 802.3ab	1000Base-Tx Gigabit Ethernet
	IEEE 802.3af/at/bt	Power over Ethernet
Switch Property	Flow Control	IEEE 802.3x flow control, back pressure flow control
	Data Process	Store and Forward
	Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet port
	Switching Fabric (Back-Plane)	10Gbps
	Jumbo Frame	10Kbytes
	Memory Buffer	1Mbits
	MAC Table Size	8K
Port Interface	Ethernet (RJ45) Port	4*10/100/1000Tx (90W/Port) and 1*100/100/1000Tx auto negotiation, full/half duplex mode, and auto MDI/MDI-X connection
	PoE Pin Out	V-, V-, V+, V+, for pin 1, 2, 3, 6; V+, V+, V-, V-, for pin 4, 5, 7, 8 *Support Modes: Mode A, Mode B, 4-Pair Mode
	Dip Switch	Control PoE Function by port
	LED Indicators	Per unit: Power 1, Power 2, Fault, PoE Load (P/L) Per port: Speed/Link/Active PoE: On-connected to PD devices
	Relay Contact	24VDC, 1A resistive
	Network Cable	10BaseT: 2-pair UTP/STP Cat.3,4,5 cable EIA/TIA-568 100-ohm (100m) 100BaseTX: 2-pair UTP/STP Cat.5 cable EIA/TIA-568 100-ohm (100m) 1000BaseTX: 4-pair UTP/STP Cat.5/5E cable EIA/TIA-568 100-ohm (100m)
Mechanical Characteristics	Housing	Metal IP30 protection
	Dimension	54 x 142 x 99 mm
	Weight	Unit Weight: 1.85 lbs. Shipping Weight: 2.51 lbs.
	Mounting	DIN-Rail Mounting, Wall Mounting
Power Requirement	Input Voltage	Dual 48–55VDC Redundant Input *For IEEE 802.3bt application, power supply not less than 53V is recommended
	Power Connection	1 removable 6-contact terminal block
	Overload Current Protection	Present
	Reverse Polarity Protection	Present

	Power Consumption	5W
	Max PoE Power Budget	180W @ 48-55VDC
	PoE Power Output	90W max. per PoE port
	PoE Port Priority	Priority: Port 1 > Port 2 > Port 3 > Port 4
Environmental Limits	Operating Temperature	Standard: -10°C to 65°C EOT: -40°C to 75°C
	Ambient Relative Humidity	5% to 95%, (non-condensing)
	Storage Temperature	-40°C to 85°C
Regulatory Approvals	EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
	EMS	CE EN55035/EN61000-6-2 Class A: IEC61000-4-2 (ESD) IEC61000-4-3 (RS) IEC61000-4-4 (EFT) IEC61000-4-5 (Surge) IEC61000-4-6 (CS) IEC61000-4-8 (Magnetic Field)
	Free Fall	IEC60068-2-32
	Shock	IEC60068-2-27
	Vibration	IEC60068-2-6
	Green	RoHS Compliant
	Safety	FCC, CE
	Warranty	5 Years

Table 6.1

LNP-0500G-bt Series Technical Specifications

Antaira Customer Service and Support

(Antaira US Headquarter) + 844-268-2472

(Antaira Europe Office) + 48-22-862-88-81

(Antaira Asia Office) + 886-2-2218-9733

Please report any problems to Antaira:www.antaira.com / support@antaira.comwww.antaira.eu / info@antaira.euwww.antaira.com.tw / info@antaira.com.tw

Any changes to this material will be announced on the Antaira website.