

Installation Instructions

CMSLP-380-520 - UHF Ceiling Antenna

SW3-826 - Document Version 1

A Introduction

The CMSLP-380-520 is a UHF ceiling mount antenna designed to be low profile and un-obtrusive. The antenna can be mounted to non-conductive panels using the supplied nut and mounting screws. If required the antenna can also be mounted to a vertical surface such as a wall or room divider. The antenna is supplied with FR cable and a variety of connectors.

B Mounting requirements and selecting location



The antenna should be mounted on non-metallic / non-conductive panels. Mounting on metal surfaces will detrimentally affect performance.

The antenna should normally be placed in a flat, horizontal orientation with the cable exit at the top. However where required the antenna can be mounted to walls or room dividers in a vertical orientation with the cable exit at the side. When ceiling mounted the antenna should be mounted centrally within the desired coverage area and when mounted vertically to a wall or divider the antenna should be deployed facing in the desired direction of coverage.

The antenna should be spaced as far away from any nearby metal structure as possible. Ensure that there is adequate under panel clearance and that the coaxial cable can be routed to the equipment.

Ensure that the selected mounting location can safely be accessed using the equipment that is available.

C Antenna Mounting

Where the antenna will be fitted on a lift out ceiling panel, it may be preferable to remove the panel and mount the antenna on the panel whilst working at ground level.

Mark the position for the centre fixing and make a clearance hole for the relevant connector. In the case of an N female connector this will be 18mm (3/4") and in the case of a 4.3-10 female connector it should be 24mm (1"). Drill a pilot hole first and then increase to the required size.

If using the optional additional screw fixings mark the position of the mounting holes (the antenna can be used as a template) & drill. Plastic M6 screws are supplied but if mounting to an appropriate material self tapping screws can be used. Screws should be M6 or 1/4 inch pan head screws of an appropriate length for the installation.

Remove the supplied nut and mount the antenna being careful not to kink or damage the cable.- Re fix the nut and tighten. Tighten (but do not overtighten) any screw fixings over-tightening may damage the antenna cover.

D Routing and terminating coaxial cable(s)

Route the coaxial cable to the mating connector, ensuring that the cable is secured and protected from subsequent damage during access. The cable should never be kinked and the minimum bend radius of 32mm (1.25") must be observed.

If cable ties are used, they should not be overtightened, as this will distort the cable profile and could affect the antenna performance. Any excess cable should be laid "side by side" (not coiled) and can be secured by cable ties or tape.


Connectors should be cleaned with air or a soft brush and then tightened to the correct torque which is 1Nm for the N type or a maximum of 5Nm for 4.3-10 connectors.

E. Commission and test


Check the comms cables:

- Carry out VSWR check, the VSWR should measure <2.5:1 in transmit band.
- Connect the cable to the radio device

F. Mounting using central bush

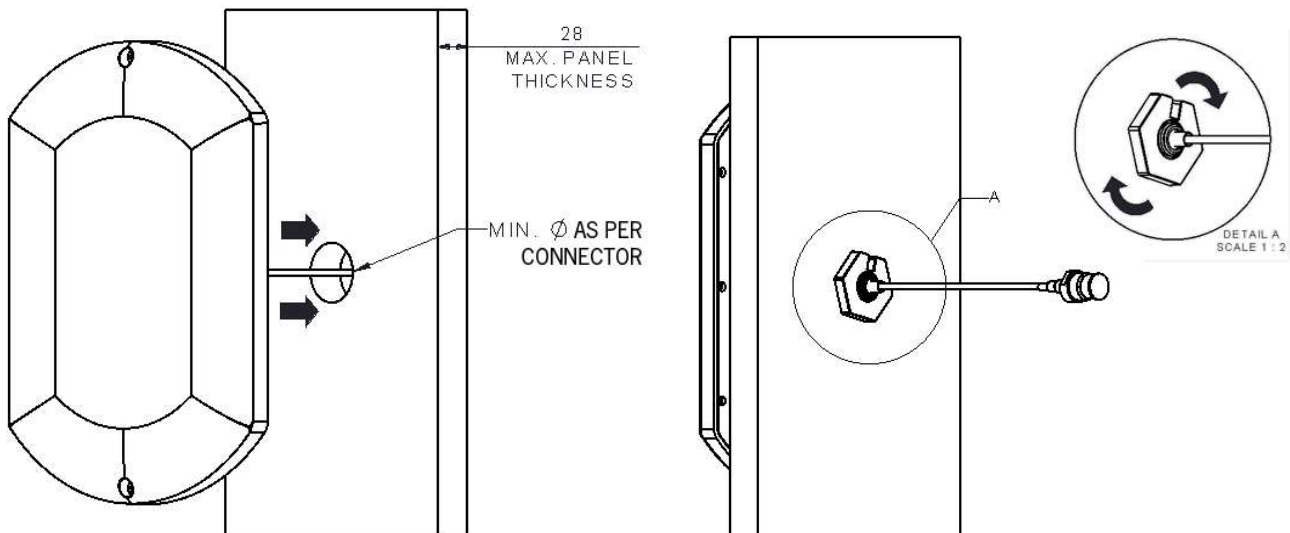

G. Mounting with screw fixings

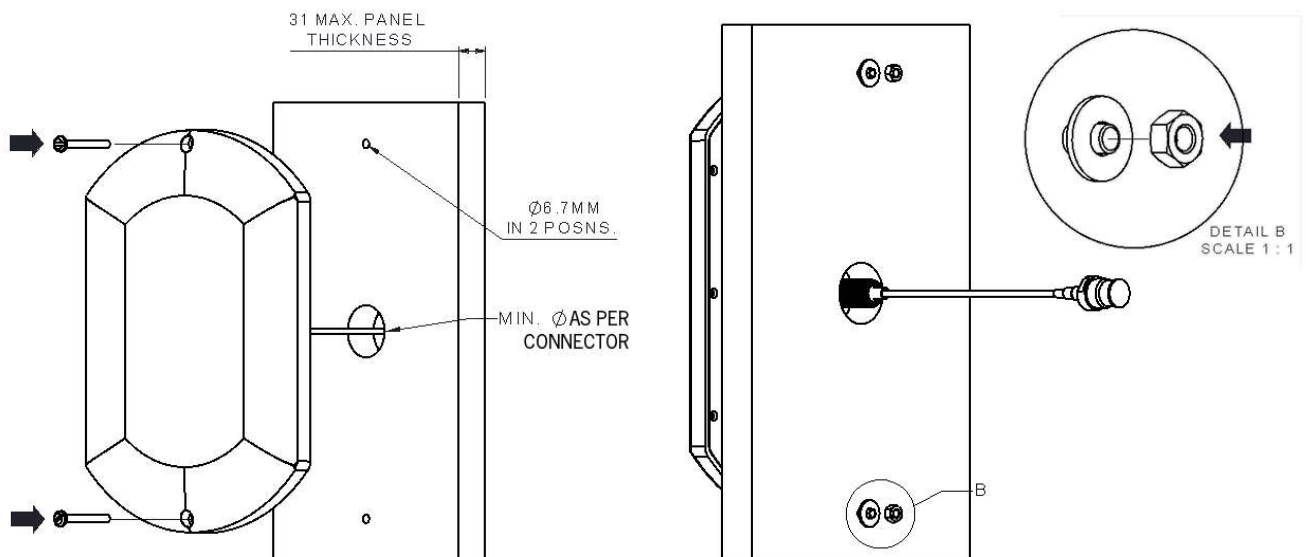

H. Notices



DO NOT

- operate the transmitter when someone is within 20cm (8") of the antenna.
- operate the equipment in an explosive atmosphere.
- attempt to install the antennas without the proper safe equipment to access the install location.
- chew parts or put them in mouth, keep away from unsupervised children. Dispose of parts as WEEE waste do not send to landfill.

**European Waste Electronic Equipment Directive 2002/96/EC**

Waste electrical products should not be disposed of with household waste. All electronic products with the WEEE logo must be collected and sent to approved operators for safe disposal or recycling. Please recycle where facilities exist. Many electrical/electronic equipment retailers facilitate "Distributor Take-Back scheme" for household WEEE. Check with your Local Authority or electronic retailers for designated collection facilities where WEEE can be disposed of for free.

**Directive 2011/65/EU (RoHS 2)**

RoHS 2 compliance is declared per Directive 2011/65/EU and its subsequent amendments with exemption 6.c applied.

REACH (Registration, Evaluation, Authorisation and Restriction of Chemicals, EC 1907/2006)

This product contains Lead (CAS No. 7439-92-1) which is classified as an SVHC (Substance of Very High Concern) as being toxic to reproduction under Article 57c. of REACH. **Do not chew parts or put them in mouth, keep away from unsupervised children. Dispose of parts as WEEE waste do not send to landfill.**