

# Trooper™ Max

Combination Antenna - Cellular, WiFi, GNSS  
with LMR Option

GLPSF Platform



GLPSF PLATFORM

## INSTALLATION INSTRUCTIONS

# Trooper™ Max GLPSF Platform

---

### **Stud Mount (Typical Installation)**

1. Select a mounting location centered on a ground plane with a minimum of 203.2 mm (8 inches) in any given direction. Space at least 406.4 mm (16 inches) from adjacent antennas or metallic structures. Ensure that there is 50.8 mm (2 inches) diameter around the mounting hole for the mounting stud, cable routing, and mounting nut and tightening procedure.
2. Cut or drill a 18 mm (0.71 inch) hole through the mounting surface (Figure 1).
3. Ensure that the hole edges are clean and free of any debris, sharp edges or burrs to prevent cable damage during installation.
4. Clean the mounting surface around the hole. The surface must be free of any debris that would prevent the outer rubber gasket from forming a seal.
5. Feed the cables through the hole taking care not to damage the jacket, and route them to desired location.
6. Remove the liner from the inner foam gasket, insert the mounting stud through the hole, and position the antenna onto the mounting surface.
7. Beneath the mounting surface, install the plastic slotted washer and the slotted lock nut onto the mounting stud and tighten by hand. Then tighten with a wrench until the antenna is fully seated or with a torque wrench to 8 Nm (6 lbf•ft) minimum.
8. Visually inspect the outer rubber gasket to make a proper seal against the mounting surface and radome.
9. If you choose a whip antenna, install the whip antenna and tighten by hand or a torque wrench to 0.9Nm (8lbf.inch), visually inspect the outer rubber gasket to make a proper seal against the radome.

INSTALLATION INSTRUCTIONS

# Trooper™ Max GLPSF Platform


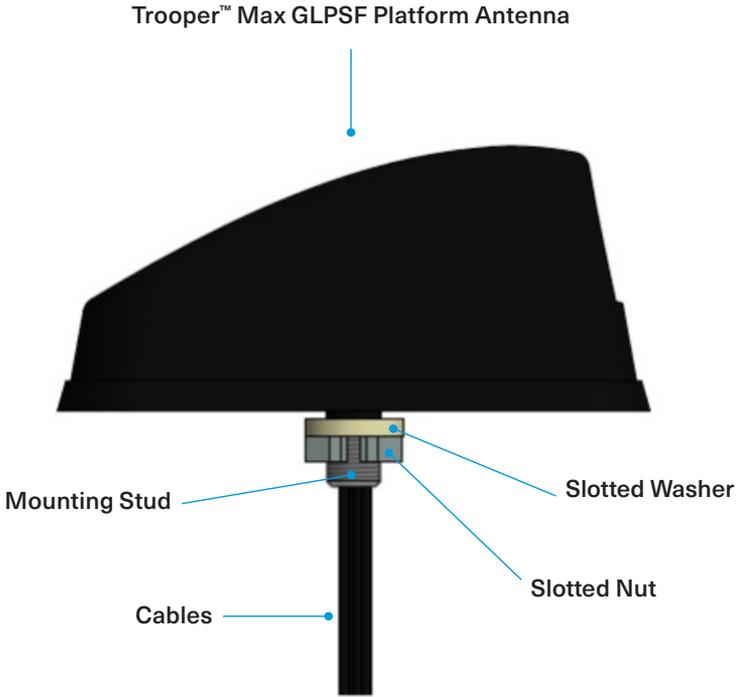


Figure 1: Mounting Hole



# Trooper™ Max GLPSF Platform

---

## Need help?

For assistance with installation, please contact

T: +1 630 372 6800



**PCTEL, Inc.**

T: +1 630 372 6800 | [pctel.com](http://pctel.com) | NASDAQ: PCTI

Specifications subject to change without notice. PCTEL shall have no liability for damage or injury resulting from improper installation. PCTEL® is a registered trademark of PCTEL, Inc. ©2021 PCTEL, Inc. All rights reserved. (April 2021)