

IMC-100A-WA-M-T

10/100Tx to 100Fx Industrial Media Converter, Single Fiber (WDM-A), Single-Mode 20KM, Tx1310nm – Rx1550nm



Features


- ▶ UTP to Fiber Media Converter
- ▶ Store-and-Forward Switching Architecture
- ▶ RJ45 Port Support Auto MDI/MDI-X Function
- ▶ Auto Negotiation Speed, Half/Full Duplex
- ▶ Reverse Polarity Power Protection
- ▶ Redundant Power Input Design: 12~36VDC
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support Included
- ▶ Operating Temp.- STD: (-10~70°C), EOT: (-40~75°C)
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' IMC-100A series is an industrial grade unmanaged Ethernet media converter featuring a simple plug-and-play operation to quickly convert between Ethernet and fiber optics. The IMC-100A series supports fast Ethernet speeds of 100Mbps, featuring 1*10/100Tx Ethernet port and 1*100Fx fiber port. This unit is an ideal solution for applications looking to convert between an RJ45 Ethernet connection and a fiber connection.

Antaira's IMC-100A series is IP30 rated and DIN-rail mountable. This product series supports a low voltage power input range of 12~48VDC. Also, there are two operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides Ethernet and fiber optic connectivity for outdoor or harsh industrial environment applications, such as, security surveillance, ITS-traffic monitoring systems, oil/gas and mining, facility management for power/utility, water wastewater treatment plants, and lastly, automated production lines in factory automation.

DIMENSIONS

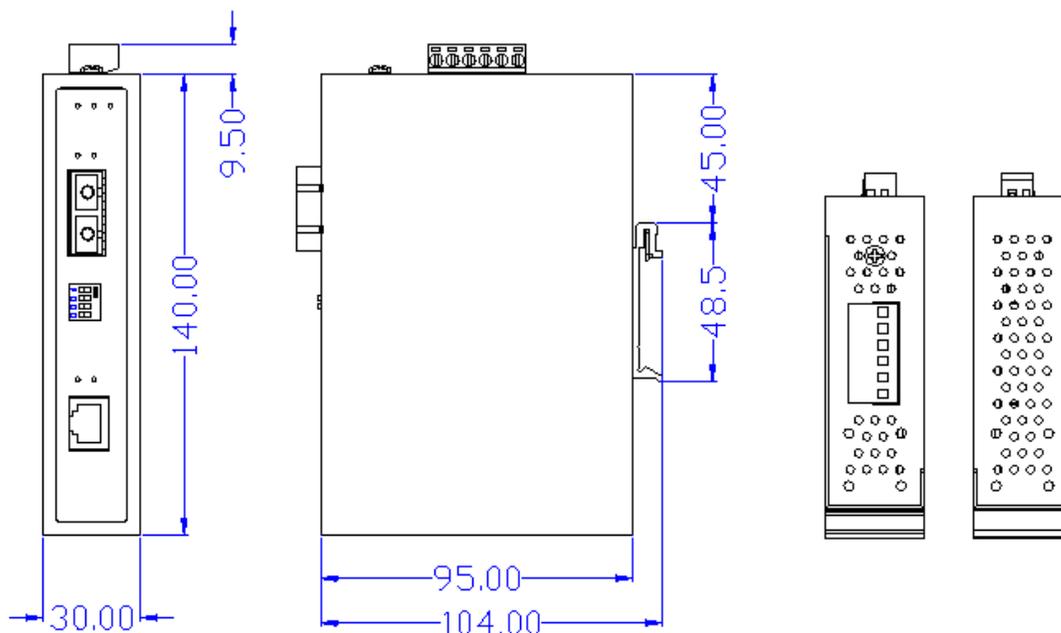

SPECIFICATIONS

Technology	
Standards	IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3x flow Control & Back-Pressure
Processing Type	Store and Forward
Flow Control	IEEE 802.3x back pressure flow control
Protocol	CSMA/CD
Switch Properties	
Switch Architecture	Back-Plane (Switching Fabric): 10.0Gbps
Transfer Rate	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet
Port Interface	
Ethernet RJ45 Port	1*10/100Tx auto negotiation speed, Full/Half duplex mode, and auto MDI connection
Fiber Parameters	Fiber Core: Multi-Mode (62.5/125um ~ 50/125um) Single-Mode (9/125um ~ 10/125um) Wavelength: 1310nm Fiber Distance: Multi-Mode Fiber 2Km Single-Mode Fiber 30Km WDM: Mode A Tx1310nm Rx1550nm WDM: Mode B Tx1550nm Rx1310nm
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)

Mechanical Characteristics	
Housing	Metal IP30 rated
Dimension	30 x 140 x 95 mm
Weight	Unit: 0.95 lbs.; Shipping: 1.4 lbs.
Mounting	DIN-Rail; Wall-Mount (optional)
Power Requirement	
Input Voltage	12~48VDC Redundant Input
Power Connection	1 Removable 6-contact terminal block
Overload Current Protection	Present
Power Reverse Polarity Protection	Present
Power Consumption	3 Watts
Environmental Limits	
Operating Temperature	STD: -10 to 70°C EOT: -40 to 80°C
Storage Temperature	-40°C ~ 85°C
Ambient Relative Humidity	5 to 95%, (non-condensing)
Regulatory Approvals	
EMI	FCC Class A
EMS	IEC61000-4-2,3,4,5,6,8 IEC61000-6-2,4
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE, UL
Warranty	5 Years

ORDERING INFO

IMC-100A-M	10/100Tx to 100Fx industrial media converter, multi-mode, 2Km, SC fiber connector
IMC-100A-M-T	10/100Tx to 100Fx industrial media converter, multi-mode, 2Km, SC fiber connector, -40 to 80°C
IMC-100A-S3	10/100Tx to 100Fx industrial media converter, single-mode, 30Km, SC fiber connector
IMC-100A-S3-T	10/100Tx to 100Fx industrial media converter, single-mode, 30Km, SC fiber connector, -40 to 80°C
IMC-100A-ST-M	10/100Tx to 100Fx Industrial media converter, multi-mode, 2Km, ST fiber connector
IMC-100A-ST-M-T	10/100Tx to 100Fx industrial media converter, multi-mode, 2Km, ST fiber connector, -40 to 80°C
IMC-100A-ST-S3	10/100Tx to 100Fx industrial media converter, single-mode, 30Km, ST fiber connector
IMC-100A-ST-S3-T	10/100Tx to 100Fx industrial media converter, single-mode, 30Km, ST fiber connector, -40 to 80°C
IMC-100A-WA-M	10/100Tx to 100Fx industrial media converter, multi-mode (WDM-A), 2Km, SC fiber connector
IMC-100A-WA-M-T	10/100Tx to 100Fx industrial media converter, multi-mode (WDM-A), 2Km, SC fiber connector, -40 to 80°C
IMC-100A-WB-M	10/100Tx to 100Fx industrial media converter, multi-mode (WDM-B), 2Km, SC fiber connector
IMC-100A-WB-M-T	10/100Tx to 100Fx industrial media converter, multi-mode (WDM-B), 2Km, SC fiber connector, -40 to 80°C
IMC-100A-WA-S2	10/100Tx to 100Fx industrial media converter, single-mode (WDM-A), 20Km, SC fiber connector
IMC-100A-WA-S2-T	10/100Tx to 100Fx industrial media converter, single-mode (WDM-A), 20Km, SC fiber connector, -40 to 80°C
IMC-100A-WB-S2	10/100Tx to 100Fx industrial media converter, single-mode (WDM-B), 20Km, SC fiber connector
IMC-100A-WB-S2-T	10/100Tx to 100Fx industrial media converter, single-mode (WDM-B), 20Km, SC fiber connector, -40 to 80°C

Optional Accessories

DR-45-24	75W industrial Din-Rail power supply (24VDC)
DR-75-24	120W industrial Din-Rail power supply (24VDC)
DR-120-24	240W industrial Din-Rail power supply (24VDC)