


# ZigBee OEM module, ProBee-ZE10

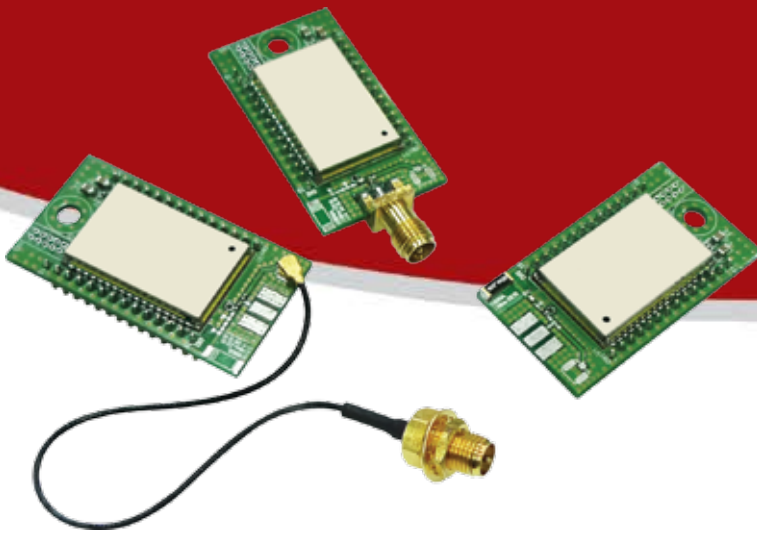

## Features

- Fully supports Zigbee®/Zigbee Pro 2007 wireless connectivity
- Integrated 2.4GHz, IEEE 802.15.4-compliant coprocessor
- Various antenna options according to users' requirement, up to 1.6km with optional 5 dBi dipole antenna
- Transmit Power: +20dBm E.I.R.P (max.)
- Receiver Sensitivity: -102dBm @1% BER
- TX Current: 190mA @3.3V (max.)
- RX Current: 45mA @3.3V (max.)
- Sleep Current: ≤ 2uA
- Full UART Signals Support: UART\_TXD/RXD, RTS/CTS, DTR/DSR
- 4 Analog Inputs, 13 Digital Inputs/Outputs
- Supports various self management features wirelessly such as firmware upgrade and system configuration by using modem AT command set
- Easy to use Windows configuration tool available


The **ProBee-ZE10** is an all-in-one ZigBee OEM module with integrated ZigBee core and radio/antenna circuits together with high level software library so OEM manufacturers can easily and cost effectively integrate ZigBee functionality into target products in timely manner.

The ZE10 OEM module is designed to meet specific requirements of low cost and low power wireless applications such as home automation or smart energy by adopting the ZigBee technology. The ZE10 is based on the Ember EM250 ZigBee core and fully certified under the latest ZigBee Pro 2007 standard for the maximum compatibility.

Despite of its low cost and low power consumptions, the ZE10 provides high performance and robust data transfer capability for wide range of applications. The ZE10 can transfer data at up to 250 kbps and reach up to 1.6 km (1 miles) outdoor line-of-sight.

## Pin Assignment

NO	Pin Assignment
1	GND
2	NC
3	GPIO_1
4	GPIO_2
5	GPIO_0
6	Factory Reset
7	GPIO_3 / ADC_0
8	GPIO_4 / ADC_1
9	H/W RESET
10	GPIO_5 / ADC_2
11	GPIO_6 / ADC_3
12	+3V3
13	NC
14	GND

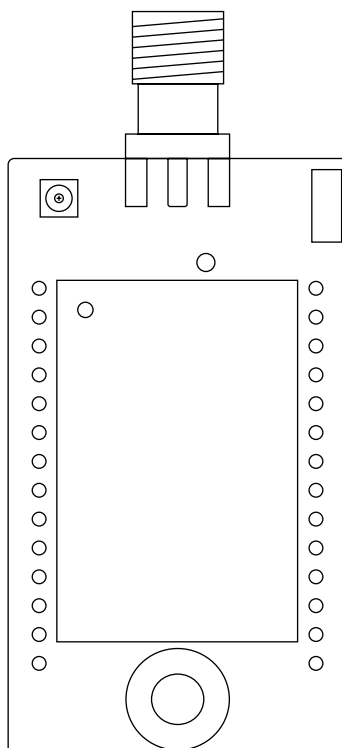

Pin Assignment	NO
GND	28
NC	27
NC	26
NC	25
GPIO_7	24
GPIO_9 / RTS	23
GPIO_8 / CTS	22
UART_TXD	21
UART_RXD	20
GPIO_10 / DTR	19
GPIO_11 / DSR	18
GPIO_12	17
GND	16
GND	15

# ZigBee OEM module, ProBee-ZE10

## Specifications

### RF Characteristics

- Frequency Band: 2.4 GHz
- Interface Immunity: DSSS
- Transmit Power: +20dBm E.I.R.P (max.)
- Receiver Sensitivity: -102dBm @1% BER
- RF Data Rate: 250 kbps
- Working Distance: Up to 1.6km using 5 dBi dipole antenna
- Various Antenna/Connector Options: Dipole 1/3/5dBi, U.FL, Chip
- Channels: 14
- Channel Spacing: 5 MHz

### ZigBee Network

- Network topology: Mesh
- Stack profile: ZigBee / ZigBee Pro 2007
- Network addressing: Channel, PAN ID, EPID

### ZigBee Data Transmission

- Unicasting
- Multicasting
- Broadcasting
- Many-to-One Communication
- Enhanced Reliability based on data retransmission

### ZigBee Security

- Network Layer security with one Trust Center for efficient operation
- 128 bit AES encryption algorithms
- Strong, NIST-approved security

### Interfaces

- Serial Data Interface: 1 UART
- Serial Data Rate: 1 Mbps
- ADC: 4 Inputs
- 13 Digital Inputs/Outputs

### Device Management and Configuration

- Configuration Method: AT Commands, ProBee Manager
- Remote Configuration
- Remote Firmware Upgrade using both Cloning and Pass-thru methods
- Supports rich neighborhood device scanning and monitoring using AT commands

### Power Requirements

- Supply Voltage: 2.7~3.6 VDC
- TX Current: 190mA @3.3V (max.)
- RX Current: 45mA @3.3V (max.)
- Sleep Current:  $\leq 2\mu A$

### Physical Properties and Others

- Pin: 2.0mm Pin Header 14 x 2
- Size: 51.7 mm x 23.0 mm x 11.15 mm (2.03 in x 0.90 in x 0.43 in)
- Operating Temperature: -40°C to 85°C

**Certification:** FCC, CE, TELEC, KCC

**Warranty:** 3-year limited warranty

## Ordering Information

Part number	Description
<b>ZE10C-00</b>	ProBee ZE10 ZigBee OEM Module w/ Chip Antenna
<b>ZE10U-00</b>	ProBee ZE10 ZigBee OEM Module w/ U.FL Connector
<b>ZE10S-00</b>	ProBee ZE10 ZigBee OEM Module w/ RPSMA Connector
<b>ZE10-SK01</b>	ProBee ZE10 Starter Kit

### Optional Accessories

Part number	Description
<b>SAT-G01R</b>	1 dBi Stub Antenna, RP-SMA Plug, Right-hand Thread
<b>DAT-G01R</b>	3 dBi Dipole Antenna, RP-SMA Plug, Right-hand Thread
<b>DAT5-G01R</b>	5 dBi Dipole Antenna, RP-SMA Plug, Right-hand Thread
<b>SEC-G01R</b>	15cm RPSMA Antenna Extension Cable, Right-Hand Thread
<b>UEC-G01R</b>	12cm U.FL to RPSMA Cable, Right-Hand Thread

## Applications

- Advanced Metering Infrastructure
- Home Area Networks (HAN)
- Neighborhood Area Networks (NAN)
- Home Automation
- Advanced Lighting, Entertainment, and Climate Control Systems
- Service-based Monitoring, Security, and Awareness Systems
- Commercial Building Automation
- Climate & Lighting Control Systems
- Industrial and Domestic Applications

### U.S. / Canada / South America

Tel: 408-448-1997 Fax: 408-907-3738  
Toll Free (US/Canada): 8668-US-SENA (866-887-7362)

### EU / Africa

Tel: +33 (0)1 53 53 16 29 Fax: +33 (0)1 70 24 70 90

### Asia / Pacific

Tel: +82-2-571-8283 Fax: +82-2-573-7710

### Contact us via E-mail

General Information: [info@sena.com](mailto:info@sena.com)  
Sales & Distribution: [sales@sena.com](mailto:sales@sena.com)  
Technical Support: [support@sena.com](mailto:support@sena.com)

For more information, please visit us at <http://www.sena.com>

**SENA**  
[www.sena.com](http://www.sena.com)