


Hybrid RF Protector

Hybrid, multistage, multi-strike, fast response, high current capacity, ± 6 VDC pass coaxial lightning protector configured with N female connectors for RF operating between 800 MHz to 2.5 GHz.

PCT-DGXZ+06NFNF-A

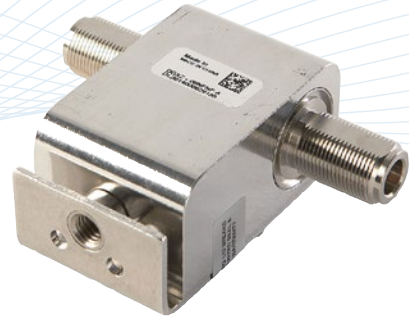

Features

- Patented dual path RF and DC protection
- Multi-strike capacity
- Weatherized housing
- Low throughput energy
- Wide bandwidth

Standards and Certificates


- IEC 60529IP67
- Bellcore #TA-NWT-00487
- RoHS compliant

Technical Data

Line On Voltage	± 6 VDC
Protected Side Connector	N Female
Surge Side Connector	N Female
Turn On Voltage	± 6.5 Vdc

Mechanical Specifications

Model	PCT-DGXZ+06NFNF-A
Frequency Range	800 MHz to 2.5 GHz
VSWR	$\leq 1.1:1$

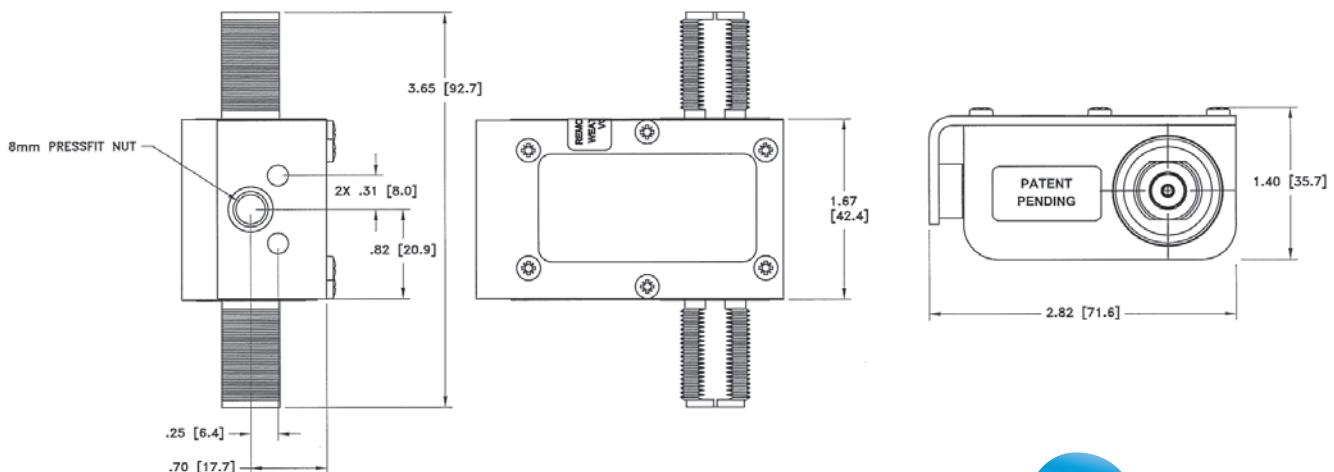

CONTACT US

**For more information about
this product contact us**

> pctel.com/contact

Solving Complex Wireless Challenges

PCTEL is a leading global provider of wireless technology solutions, including purpose-built Industrial IoT devices, antenna systems, and test and measurement products. Trusted by our customers for 29 years, we solve complex wireless challenges to help organizations stay connected, transform, and grow.



PCTEL, Inc.

T: +1 630 372 6800 | pctel.com

Specifications subject to change without notice. Bluetooth® is a registered trademark of Bluetooth SIG. ©2023 PCTEL, Inc. All rights reserved. (May 2023)