

LNP-C800G Series

8-Port Industrial Compact PoE+ Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000Tx (30W/Port), 48~55VDC Power Input



FEATURES

- ▶ Supports 8*10/100/1000Tx IEEE 802.3af/at Compliant with 30W/Port
- ▶ Supports 9.2Kbytes Jumbo Frame
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ Power Input: 48~55VDC in 6-Pin Terminal Block
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature - STD: -10°C to 65°C, EOT: -40°C to 75°C
- ▶ 5-Year Warranty




INTRODUCTION

Antaira Technologies' LNP-C800G Series is an 8-port industrial compact PoE+ gigabit unmanaged Ethernet switch that supports 8*10/100/1000Tx Ethernet ports. The LNP-0800G series is a backward compliant PoE+ switch that will support IEEE 802.3af/at standards providing a maximum of 30 watts per port with an input voltage of 48~55VDC.

Antaira's LNP-C800G Series has been specifically designed for rugged and harsh environmental deployments. This product series is housed in a hardened IP30-rated metal enclosure that includes DIN-rail and wall mounting hardware. There are two wide-operating temperature models for either a standard temperature range (STD: -10°C to 65°C) or an extended temperature range (EOT: -40°C to 75°C). The LNP-C800G Series also provides high EFT and ESD protection for any industrial networking application within factory automation, ITS (including on-vehicle), solar, security, or any other outdoor or harsh environment.

DIMENSIONS

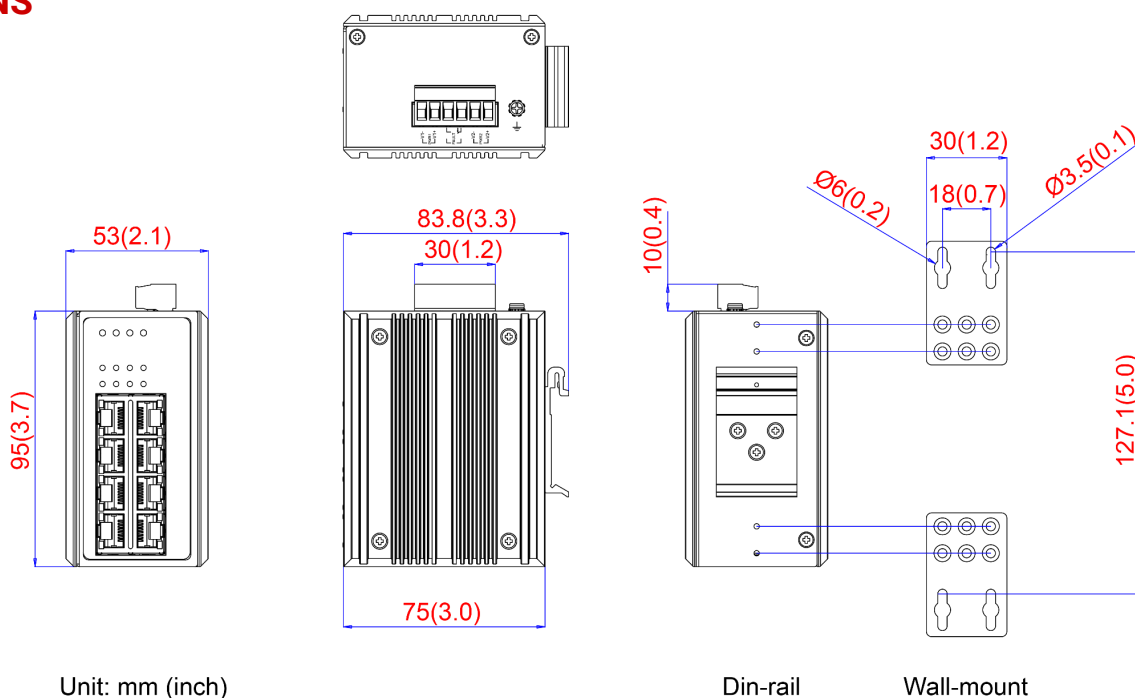

SPECIFICATIONS

TECHNOLOGY		MECHANICAL CHARACTERISTICS	
Standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000BaseT Gigabit Ethernet IEEE 802.3af/at/bt Power over Ethernet	Housing	Metal, IP30 protection
Processing Type	Store and Forward	Dimension	53 x 95 x 75 mm
Protocol	CSMA/CD	Weight	Unit: 1.27 lbs. Shipping: 1.67 lbs.
Flow Control	IEEE 802.3x flow control, back pressure flow control	Mounting	DIN-Rail mounting, Wall mounting
SWITCH PROPERTIES		POWER REQUIREMENT	
Switch Architecture	Back-Plane (Switching Fabric): 16Gbps	Input Voltage	48~55VDC Redundant Input
Transfer Rate	14,880pps for Ethernet 148,800pps for Fast Ethernet 1,488,000pps for Gigabit Ethernet	Power Connection	1 removable 6-contact terminal block
Jumbo Frame	9.2Kbytes	Relay Contact	24VDC, 1A resistive
MAC Table Size	4K	Overload Current Protection	Present (Slow-Blown Fuse)
Memory Buffer	1.5Mbits	Reverse Polarity Protection	Present
PORT INTERFACE		System Power Consumption	Max. 5.5W full loading
Ethernet Port	8*10/100/1000Base-TX (30W/Port) Auto-negotiation speed, Full/Half duplex mode, and Auto MDI/MDI-X connection	Max PoE Power Budget	240W
PoE Pin Out	V+, V+, V-, V-, for pin 1, 2, 3, 6 (End-span, MDI Alternative A)	ENVIRONMENTAL LIMITS	
LED Indicators	System: Power 1, Power 2, Fault, P/L Ethernet Ports: On-Link/Flash-data transmitting PoE: On-connected to PD devices	Operating Temperature	STD: -10°C to 65°C EOT: -40°C to 75°C
Network Cable	10BaseT: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100BaseTX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 1000BaseTX: 4-pair UTP/STP Cat. 5/5E cable; EIA/TIA-568 100-ohm (100m)	Storage Temperature	-40°C ~ 85°C
		Ambient Relative Humidity	5 to 95%, (non-condensing)
		REGULATORY APPROVALS	
		EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
		EMS	CE EN55035/EN61000-6-2, IEC61000-4-2,3,4,5,6,8
		Free Fall	IEC60068-2-32
		Shock	IEC60068-2-27
		Vibration	IEC60068-2-6
		Green	RoHS Compliant
		Certifications	FCC, CE
		Warranty	5 Years

ORDERING INFORMATION

LNP-C800G	8-Port Industrial Compact PoE+ Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000Tx (30W/Port), 48~55VDC Power Input
LNP-C800G-T	8-Port Industrial Compact PoE+ Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000Tx (30W/Port), 48~55VDC Power Input; EOT: -40°C to 75°C