
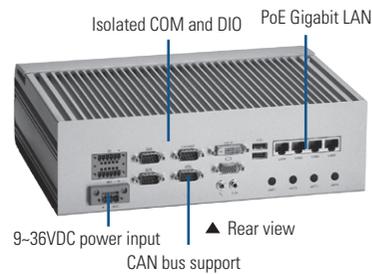


tBOX312-870-FL

Fanless Embedded System with 3rd Gen Intel® Core™ Processor and Intel® QM77 for Vehicle PC

Features

- E-Mark and ISO 7637 certified
- Comply to fire protection of railway vehicles Europe standard PrCEN TS 45545-2
- 3rd gen Intel® Core™ i7 or Intel® Core™ i3 processor
- DDR3-1600 4GB memory onboard
- Fanless design and wide temperature range from -40°C to +70°C
- Isolated RS-232/422/485, CAN bus and DIO
- USB 3.0 and SATA3
- 2 removable & lockable 2.5" SATA HDD and 1 CFast™
- 3 internal PCIe Mini Card slot and 1 SIM slot
- IEEE802.3at PoE Gigabit LAN

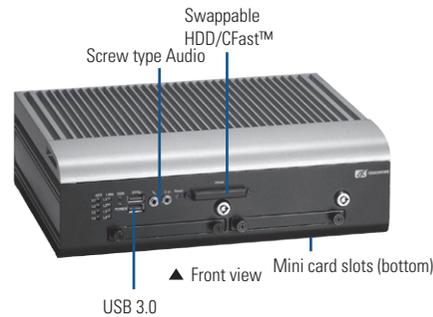

Specifications

Standard Color	Silver-Black				
Construction	Aluminum extrusion and heavy-duty steel, IP40				
CPU	Intel® Core™ i7-3517UE (1.7 GHz up to 2.8 GHz) or Intel® Core™ i3-3217UE (1.6 GHz)				
System Memory	DDR3-1600 4GB DRAM onboard				
Chipset	Intel® QM77				
BIOS	AMI UEFI BIOS with OA 3.0 built				
System I/O Outlet	<table border="0"> <tr> <td>Rear Side</td> <td> 4 x GbE LAN 3 x Isolated RS-232/422/485 1 x Isolated DI/DO (4-in/4-out) 1 x Isolated CAN Bus 2 x USB 2.0 2 x Audio (mic-in/line-out, screw type) 1 x VGA 1 x DVI-D 1 x VDC power input 1 x Remote power switch 4 x Antenna opening </td> </tr> <tr> <td>Front Side</td> <td> 2 x USB 3.0 2 x Audio (mic-in/line-out, screw type) 1 x Reset switch 2 x 2.5" SATA drive trays 1 x CFast™ slot </td> </tr> </table>	Rear Side	4 x GbE LAN 3 x Isolated RS-232/422/485 1 x Isolated DI/DO (4-in/4-out) 1 x Isolated CAN Bus 2 x USB 2.0 2 x Audio (mic-in/line-out, screw type) 1 x VGA 1 x DVI-D 1 x VDC power input 1 x Remote power switch 4 x Antenna opening	Front Side	2 x USB 3.0 2 x Audio (mic-in/line-out, screw type) 1 x Reset switch 2 x 2.5" SATA drive trays 1 x CFast™ slot
Rear Side	4 x GbE LAN 3 x Isolated RS-232/422/485 1 x Isolated DI/DO (4-in/4-out) 1 x Isolated CAN Bus 2 x USB 2.0 2 x Audio (mic-in/line-out, screw type) 1 x VGA 1 x DVI-D 1 x VDC power input 1 x Remote power switch 4 x Antenna opening				
Front Side	2 x USB 3.0 2 x Audio (mic-in/line-out, screw type) 1 x Reset switch 2 x 2.5" SATA drive trays 1 x CFast™ slot				
Watchdog Timer	255 levels, 0 ~ 255 sec./min.				
Storage	2 x 2.5" SATA HDD (Removable and with lock protection) supports RAID 0/1 1 x CFast™				
Expansion Interface	3 x PCIe Mini Card slot 1 x SIM card slot				
System Indicator	1 x green LED for system power on 1 x blue LED for HDD active 1 x green LED for LAN1 link 1 x green/yellow LED for LAN 1 speed 1 x green LED for LAN2 link 1 x green/yellow LED for LAN 2 speed 1 x green LED for LAN3 link 1 x green/yellow LED for LAN 3 speed 1 x green LED for LAN4 link 1 x green/yellow LED for LAN 4 speed				

Power Supply	Power input: 9 ~ 36VDC Typical: 12/24 VDC
Power Consumption	1.8A @ 24V (without PoE) PoE power output max 30 W
Operating Temperature	-40°C ~ +70°C (-40°F ~ +158°F) W/T SSD -25°C ~ +55°C (-13°F ~ +131°F) W/T HDD
Humidity	5% ~ 95%, non-condensing
Vibration Endurance	5 Grms with CFast™ (5-500Hz, X, Y, Z directions) 1 Grms with HDD (5-500Hz, X, Y, Z directions)
Dimensions	288 mm (11.33") (W) x 211 mm (8.3") (D) x 85.7 mm (3.37") (H)
Weight (net/gross)	5.5 kg (12.12 lb)/6.5 kg (14.33 lb)
Certificate	CE (Class A), E-Mark, ISO 7637, EN 0950 compliance
EOS Support	WE8S, WES 7, Linux


Ordering Information

Standard	
tBOX312-870-FL-i7-DC	Fanless vehicle embedded system with Intel® Core™ i7 processor, 4GB DDR3-1600, 4 GbE LANs (PoE), 3 isolated COM, CFast™ and isolated CAN bus
tBOX312-870-FL-i3-DC	Fanless vehicle embedded system with Intel® Core™ i3 processor, 4GB DDR3-1600, 4 GbE LANs (PoE), 3 isolated COM, CFast™ and isolated CAN bus

Optional	
2.5" SATA HDD/SSD	16GB or above
CFast™	1GB or above
3G module	
Wi-Fi module	
Wi-Fi Bluetooth	
GPS module	

*Specifications and certifications are based on options and may vary.


Expansion & Installation



Onboard 3rd generation Intel® Core™ i7 or i3 processor and 4GB DDR3-1600 DRAM



Swappable and Lockable SATA3 HDD/SSD, Audio jack, USB 3.0 and CFast




IEEE802.3at PoE Gigabit LAN



Vehicle power input with ACC support



Isolated RS-232/422/485, CAN bus and DIO



3 PCIe Mini Card slots and 2 SIM slots

Packing List

- 1 x Quick manual
- 1 x Driver CD
- 1 x Screw pack
- 4 x Foot pad
- 1 x Wall-mount kit

Power Protection

- DC Version**
- SCP (short circuit protection)
 - OVP (over voltage protection)
 - UVP (under voltage protection)
 - ISO 7637 pulse 1/29/39/3b/4/5a

Dimensions

