




InHand Networks

High Performance, Multiple Industrial Protocols,
Fast Custom Development

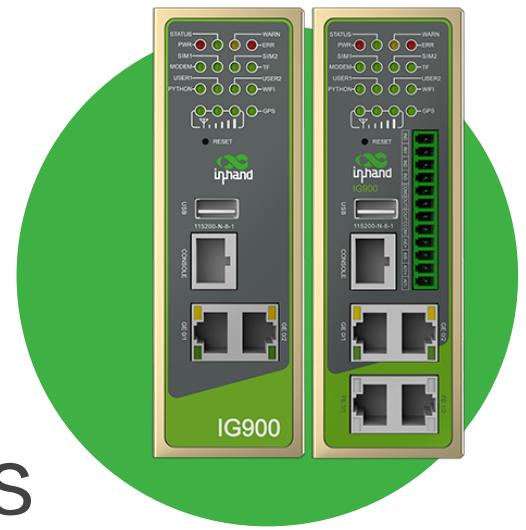

InGateway902 Series

Industrial Edge Computing Gateway

The new IIoT edge computing gateway provides uninterrupted Internet access for machines over ubiquitous 3G/4G wireless networks and multiple broadband services. With powerful edge computing capabilities, comprehensive security protection and wireless services, InGateway902 can support device networking of up to 10,000 levels, providing high-speed data channels in the true sense of device informatization.


InGateway902 features powerful edge computing capabilities. It realizes data optimization, real-time response, agile connection and intelligent analysis on the IoT edge, significantly reduces the data flow between field sites and data center, and avoid bottlenecks of cloud-end computing.

The edge computing gateway IG902 will help customers to optimize network architecture, enable more secure, responsive, and intelligent services on manufacturing sites.

IG902 edge computing gateway is ideal for networking machines on distributed IIoT sites and aggregating data to cloud-end applications, e.g.:

- Industrial equipment intelligence
- Industrial robot
- CNC machine
- Air compressor
- HVAC system
- Packaging, food, medicine manufacturing machineries
- Automated production line
- Energy: Oil & Gas, distributed PV, wind turbine
- Public utilities: heating, water, natural gas
- Smart agriculture, etc.


Application Case

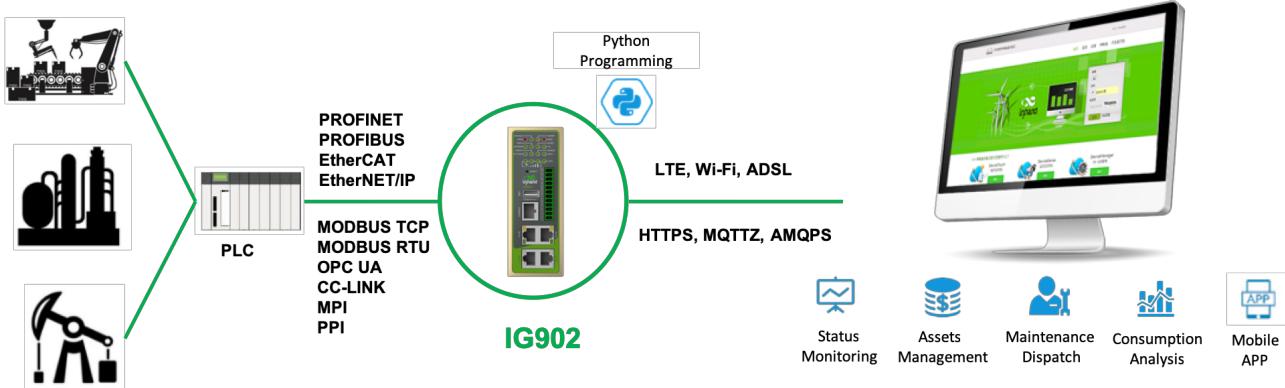

Features and Advantages

- + Support 4G LTE CAT4 & CAT1
 - + Built-in redundancies: dual SIM card, link backup, VRRP hot standby, ensuring uninterrupted network communications
 - + Powerful computing performance, providing high-performance processing resources for edge computing
 - + Supports a variety of industrial real-time Ethernet protocols and field bus protocols, compatible with a wide range of industrial equipment
 - + Support Python development, for developing user custom applications
 - + Support industrial cloud platforms: Microsoft Azure, Amazon AWS
 - + Easy for management and large-scale deployment, support SNMP protocol and InHand Device Manager cloud platform for efficient remote central management
 - + Fully industrial-grade design, ready for challenging conditions
- **Uninterrupted Internet access from anywhere**
Multiple WAN links: fast Ethernet, 3G/4G, multiple DSLs. Wherever the device is, it can be connected easily. Customers can choose LTE CAT4 (downlink/uplink: 150Mbps/50Mbps) or CAT1 (downlink/uplink: 10Mbps/5Mbps) standard network service.
 - **Powerful edge computing, adapting intelligent edge processing of different industries**
ARM Cortex-A8 processor, 1GHz CPU, up to 1GB DDR3 RAM and 8GB eMMC FLASH, the gateway owns powerful computing capabilities for data optimization, real-time response, agile connection, intelligent analysis and other data processing on the IoT edge.
 - **Multiple industrial real-time Ethernet protocols and fieldbuses**
In order to be compatible with the broadly diversified industrial controllers in the market, the edge gateway supports these protocols: Modbus TCP, Modbus RTU, OPC UA, PROFINET, PROFIBUS-DP, EtherCAT, EtherNET/IP, CC-LINK, PPI, etc.
 - **Python customization development platform**
InGateway900 is embedded with the Python development platform, customers may custom develop applications to meet own service requirements. While with the integrated SDK and APPs provided by InHand, customer may access the system APIs and other resources easily, completing custom development with shorter time to market.
 - **Multiple industrial cloud ecosystems**
InHand has become the partner of Microsoft and Amazon. The edge gateway supports Microsoft AZURE, Amazon AWS and Schneider EcoStruxure industrial cloud platforms. InHand will keep working for the development of IIoT cloud ecosystem.
 - **Complete security protection**
Complete security protection, covering user authorization and authentication, network security, and data transmission security.
 - **High reliability design**
 - Link redundancy: dual-SIM, link backup, VRRP, for continuous transmission during network failure
 - Link detection: multiple detection mechanisms, auto redial to maintain persistent connection
 - Fault recovery: Soft & hardware watchdog, self recover from faults for high device availability
 - **Support large-scale deployment**
In large-scale IIoT applications, tens of thousands of gateways are to be deployed for the networking of machines. The gateway supports SNMP and DeviceManager network management to help with effective device management and deployment.
 - **Fully industrial-grade design**
From processor chip, memory chip to communication module and power terminal, the product adopts strict industrial grade standards, meeting industrial grade on indexes like EMC 3, IP30, and wide operating temperatures. Solid and durable, ready for the challenging conditions of industrial sites.

Dimensions (mm)

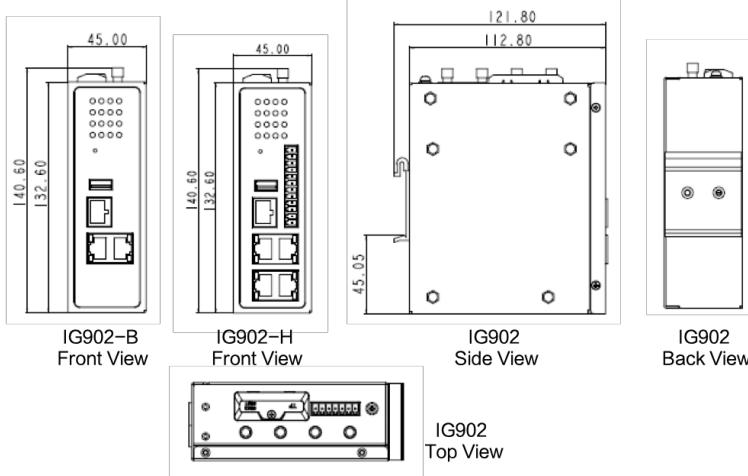

7PIN Industrial Terminal Interface Definition

Pin	Definition	Description
1	V+	Positive electrode
2	V-	Negative electrode
3	TXD	Serial RS232 send
4	RXD	Serial RS232 receive
5	GND	Serial RS232 signal ground
6	A	Serial RS485+
7	B	Serial RS485-

Product Specifications

IG902 Hardware Specifications				IG902 Software Specifications					
Item	IG902-B (Basic Version)	IG902-H (High-config Version)		Item	IG902				
Hardware Platform									
CPU	ARM Cortex-A8 1GHz			Network Access	APN, VPDN				
RAM	512MB DDR3	1GB DDR3		Access Authentication	CHAP/PAP/MS-CHAP/MS-CHAPV2				
FLASH	8GB eMMC			Network Type	LTE, WCDMA(HSPA+), EVDO, EDGE, GPRS, CDMA				
Interface									
Real-time Ethernet Protocol Port	No	2 * 100Mbps real-time industrial Ethernet protocol ports			ARP, Ethernet				
I/O	No	4-channel digital input DI 2-channel digital output DO 2-channel analog input AI			Network Protocol				
Ethernet Port	2*10/100/1000Mbps fast Ethernet ports, WAN/LAN or 2*LAN			IP Application	Ping, Traceroute, DHCP Server/Relay/Client, DNS Relay, DDNS, Telnet, SSH, HTTP, HTTPS, TFTP, FTP, SFTP				
Industrial Serial Port	RS-232 x 1, RS-485 x 1; RS-232 signal: TXD, RXD, GND; RS-485 signal: A, B, GND ESD protection: 15KV			IP Routing	Static Routing				
Console Port	RS-232 x 1, RJ-45 interface	Wi-Fi (Optional)	2.4G or 5G (802.11 ac/a/b/g/n)	Network Security					
USB	1 x USB 2.0 port	Reset Button	Pinhole button	Firewalls	Stateful packet inspection (SPI), anti-DoS attack				
SIM card Slot	1.8V/3V, drawer-type slot x 2	MircoSD Expansion	Up to 128GB		Multicast/Ping filter, Access Control List (ACL)				
GPS (Optional)	Satellite positioning GPS: SMA x 1				NAT, PAT, DMZ, port mapping, virtual server				
Mechanical Feature									
Installation	DIN-rail, wall mounting	Protection Rating	IP30	User Levels	Multi-level user authorization				
Housing	Metallic structure	Cooling	Fan-less cooling	AAA	Local authentication, Radius, Tacacs+, LDAP				
Power Supply				Data Security	IPsec VPN, OPENVPN, CA (may auto apply)				
Power Input	DC12~48V	Polarity Reverse & Overcurrent Protection	Support	Reliability					
Power Terminal	Unpluggable industrial terminal connection			Backup	VRRP, interface backup, dual-SIM backup				
Ambient Temperature and Humidity				Link Detection	Heartbeat packet detection, auto-recovery of disconnection				
Storage Temperature	-40 ~ 85°C	Working Temperature	-25 ~ 75°C	Embedded Watchdog	Device self-diagnosing, auto-recover operation faults				
Ambient Humidity	5 ~ 95% (non-condensing)			WLAN (Optional)					
Others				Standard	IEEE 802.11ac/a/b/g/n				
Real-time Clock (Optional)	Embedded real time clock (RTC), powered by super capacitor			Security	Open System, Shared Key, WPA/WPA2 certification, WEP/TKIP/AES encryption				
Indicators				Mode	AP, Client modes				
LED	POWER, STATUS, WARN, ERROR, MODEM, SIM1, SIM2, TF (card), PYTHON, USER1, USER2, WIFI, GPS, SIGNAL			Network Management					
EMC Index				Configuration Method	Local or remote HTTP, HTTPS, Telnet, SSH				
Static	EN61000-4-2, level 3	Surge	EN61000-4-5, level 3	Upgrade	Local or remote WEB, DM, TFTP, FTP, SFTP server				
Radiation Electric Field	EN61000-4-3, level 3	Conducted Disturbance	EN61000-4-6, level 3	Log	Local or remote log export, power-down log saving				
Pulse Electric Field	EN61000-4-4, level 3	Shockwave Immunity	EN61000-4-12, level 3	SMS	Status enquiry, configuration, and reboot				
Power Frequency Magnetic Field	EN61000-4-8, horizontal / vertical 400A/m (>level 3)			Dial On-demand	Activate by data, activate by SMS, scheduled online/offline				
Physical Feature				Network Management	SNMP v1/v2c/v3, InHand MIBs				
Shockproof	IEC60068-2-27	Vibration	IEC60068-2-6	InHand DM	Centralized management, batch configuration				
Free Fall	IEC60068-2-32			Network Diagnostics	Ping, Traceroute, Sniffer (network packet capture tool)				
Certification				Development Platform					
				Development Platforms	Python customization development; Microsoft Azure, Amazon AWS, Schneider EcoStruxure, InHand DN cloud platform				
Industrial Protocol									
Protocols (Basic Version)	Modbus RTU, Modbus TCP, OPC UA Client, OPC UA Server, PPI, CC-LINK			Protocols (High-config Version)	Modbus RTU, Modbus TCP, OPC UA Client, OPC UA Server, PPI, Profinet, Profibus, EtherCAT, CC-LINK, EtherNET/IP				

Ordering Guide

Model code: IG902-<B/H>-<WMNN>-<RE/PB>(H version only)-<W/NA>-<G/NA>						
Model	Version: <B/H>	Cellular Type & Module: <WMNN>	Protocol Type (H version only): <RE/PB>	WLAN: <W/NA>	GPS: <G/NA>	
IG902-<B/H>-PS08-<RE/PB>-<W/NA>-<G/NA>	B: Basic H: High-config	Worldwide: UMTS(HSPA+) Band 1/2/5/8 EDGE/GPRS/GSM 850/900/1800/1900	RE: PROFINET EtherNET/IP EtherCAT PB: PROFIBUS	W: Wi-Fi <NA>: no Wi-Fi	G: GPS <NA>: no GPS	
IG902-<B/H>-TL00-<RE/PB>-<W/NA>-<G/NA>	B: Basic H: High-config	China: LTE CAT4 LTE-FDD Band 1/3/8 LTE-TDD Band 38/39/40/41 TD-SCDMA Band 34/39 UMTS (DC-HSPA+) Band 1/5 EDGE/GPRS/GSM 850/900/1800/1900MHz	RE: PROFINET EtherNET/IP EtherCAT PB: PROFIBUS	W: Wi-Fi <NA>: no Wi-Fi	G: GPS <NA>: no GPS	
IG902-<B/H>-TL01-<RE/PB>-<W/NA>-<G/NA>	B: Basic H: High-config	China: LTE CAT4 LTE-FDD Band 1/3/5/8 LTE-TDD Band 38/39/40/41 TD-SCDMA Band 34/39 UMTS (DC-HSPA+) Band 1/8 EVDO 800MHz CDMA-1x 800MHz EDGE/GPRS/GSM 850/900/1800/1900MHz	RE: PROFINET EtherNET/IP EtherCAT PB: PROFIBUS	W: Wi-Fi <NA>: no Wi-Fi	G: GPS <NA>: no GPS	
IG902-<B/H>-FH20-<RE/PB>-<W/NA>-<G/NA>	B: Basic H: High-config	Europe and Asia Pacific: LTE CAT4 LTE-FDD Band 1/2/3/4/5/7/8/20 UMTS(DC-HSPA+) Band1/2/5/8 EDGE/GPRS/GSM 850/900/1800/1900MHz	RE: PROFINET EtherNET/IP EtherCAT PB: PROFIBUS	W: Wi-Fi <NA>: no Wi-Fi	G: GPS <NA>: no GPS	
IG902-<B/H>-FB78-<RE/PB>-<W/NA>-<G/NA>	B: Basic H: High-config	Australia and South America: LTE CAT4 LTE-FDD CAT4 Band 1/3/5/7/8/28 UMTS(DC-HSPA+) 850, 900, 1900, 2100	RE: PROFINET EtherNET/IP EtherCAT PB: PROFIBUS	W: Wi-Fi <NA>: no Wi-Fi	G: GPS <NA>: no GPS	
IG902-<B/H>-FB53-<RE/PB>-<W/NA>-<G/NA>	B: Basic H: High-config	Europe LTE CAT1 LTE-FDD Band 3/7/20 EDGE/GPRS/GSM 900/1800/MHz	RE: PROFINET EtherNET/IP EtherCAT PB: PROFIBUS	W: Wi-Fi <NA>: no Wi-Fi	G: GPS <NA>: no GPS	
IG902-<B/H>-FB63-<RE/PB>-<W/NA>-<G/NA>	B: Basic H: High-config	Asia Pacific LTE CAT1 LTE-FDD CAT1 Band 3/8/28 UMTS(DC-HSPA+) 2100	RE: PROFINET EtherNET/IP EtherCAT PB: PROFIBUS	W: Wi-Fi <NA>: no Wi-Fi	G: GPS <NA>: no GPS	
IG902-<B/H>-FB38-<RE/PB>-<W/NA>-<G/NA>	B: Basic H: High-config	North America, Verizon, AT&T, T-Mobile: LTE CAT4 LTE-FDD CAT 4 Band 2/4/5/13/17 UMTS(DC-HSPA+) Band2/5	RE: PROFINET EtherNET/IP EtherCAT PB: PROFIBUS	W: Wi-Fi <NA>: no Wi-Fi	G: GPS <NA>: no GPS	
IG902-<B/H>-FB13-<RE/PB>-<W/NA>-<G/NA>	B: Basic H: High-config	North America, AT&T, T-Mobile: LTE CAT1 LTE-FDD Band2/4/12	RE: PROFINET EtherNET/IP EtherCAT PB: PROFIBUS	W: Wi-Fi <NA>: no Wi-Fi	G: GPS <NA>: no GPS	
IG902-<B/H>-FB23-<RE/PB>-<W/NA>-<G/NA>	B: Basic H: High-config	North America, Verizon Wireless LTE CAT1 LTE-FDD Band4/13	RE: PROFINET EtherNET/IP EtherCAT PB: PROFIBUS	W: Wi-Fi <NA>: no Wi-Fi	G: GPS <NA>: no GPS	
IG902-<B/H>-EN00-<RE/PB>-<W/NA>-<G/NA>	B: Basic H: High-config	No 3G/4G communication module	RE: PROFINET EtherNET/IP EtherCAT PB: PROFIBUS	W: Wi-Fi <NA>: no Wi-Fi	G: GPS <NA>: no GPS	
Examples:	IG902-H-FH20-PN-W-G: IG902 high-config version, support Europe and Asia Pacific CAT4 networks, support PROFINET protocol, support Wi-Fi and GPS IG902-B-FB38-W: IG902 basic version, support North America CAT4 networks, Verizon certified, support Wi-Fi					

About Us

InHand Networks is a global leader of Industrial IoT, with a record of tremendous success following groundbreaking innovation since our inception in 2001.

InHand serves world-class partners and customers with industrial M2M routers, gateways, industrial Ethernet switches, rugged computers and IoT management platforms. We provide IoT solutions for various vertical markets including Smart Grid, Industrial Automation, Remote Machine Monitoring, Smart Vending, Smart City, Retail and more.

Proudly bearing the marks of both Rockwell Automation Encompass Product Partner in Asia-Pacific and Schneider Electric CAPP Technology Partner, while listed on NEEQ 430642 as of February 18, 2014, InHand Networks defines industrial innovation and reliability.



3900 Jermantown Rd., Suite 150, Fairfax, VA 22030 USA
T: +1 (703) 348-2988
E: info@inhandnetworks.com
www.inhandnetworks.com