

Ultra Low Profile MiMo WiFi Antenna

CM[X]-24-58-2[VAR]




- Ultra Low Profile
- Up to 4 x 4 MiMo Dual Band WiFi
- EN45545-2 Certified
- Certified to IP69K and IK10

The CM[X]-24-58 range has been designed to provide MiMo dual band WiFi coverage in an ultra low profile package. The compact, robust low-profile housing contains up to four antenna elements with effective isolation and low correlation covering 2.4-2.5/4.9-6GHz.

The antenna is designed to be ceiling mounted and can be fitted on a conductive or non-conductive panel. Supplied with integrated flame retardant CS32 cables (Compliant to UNECE 118.01 and EN45545-2) and a halogen free flame retardant radome the antenna is suitable for many environments.

Technical Drawing

CM4-24-58-2RSP Shown

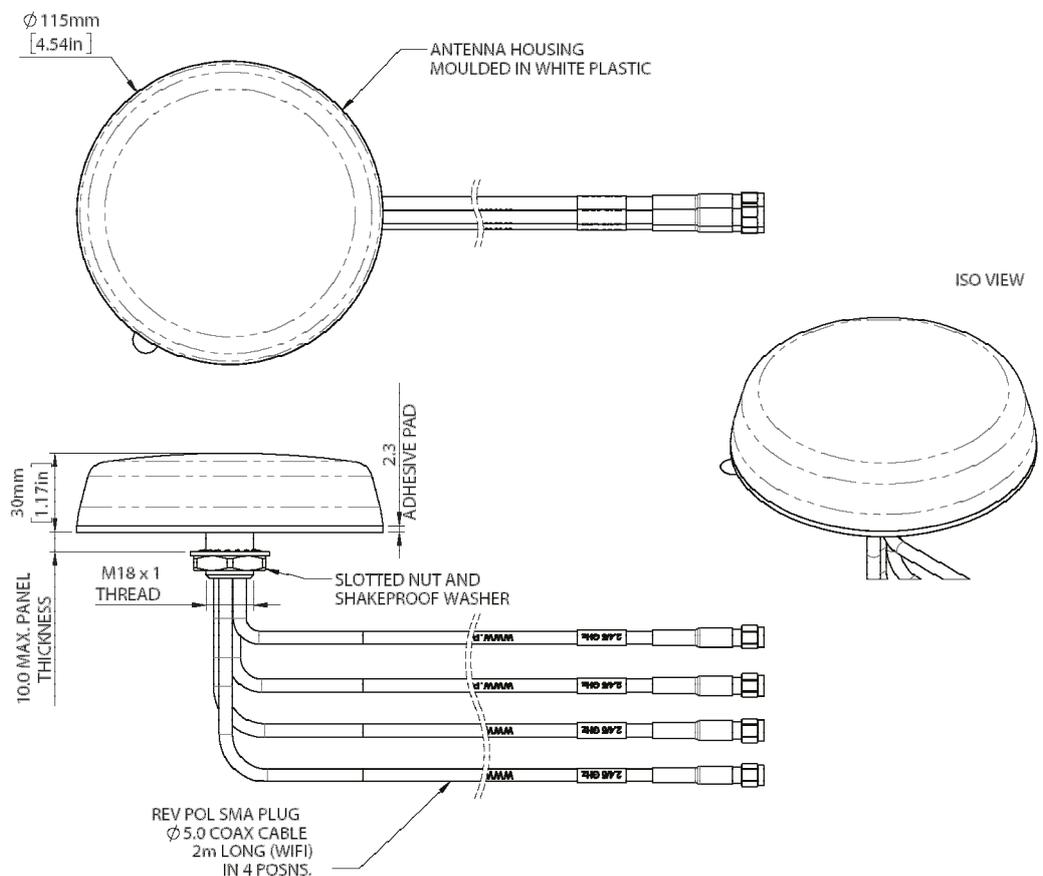

Ultra Low Profile MiMo WiFi Antenna

CM[X]-24-58-2[VAR]

Product Data

Part No.	CM2-24-58-2[VAR]	CM3-24-58-2[VAR]	CM4-24-58-2[VAR]
	2x 2.4/5.0 GHz	3x 2.4/5.0 GHz	4x 2.4/5.0 GHz
Peak Gain:	2.4-2.5GHz 4dBi	4dBi	6dBi
Isotropic †	4.9-6.0GHz 5dBi	6dBi	9dBi
Typical VSWR*		< 2:1	
Typical Isolation*		> 12dB	
Pattern		Omni-directional	
Nominal Impedance		50Ω	
Max Input Power		10W	
Mechanical Data			
Dimensions	Diameter	115mm (4.52")	
	Height	30mm (1.18")	
Operating Temp.		-30° / +70°C (-22° / 158°F)	
Material		Geloy HRA 222F	
Colour		White	
IP Rating		IP66 / IP69K**	
Vandal Protection		IK10	
Typical Weight		225g	
Regulatory Approvals		EN45545-2 : HL 1-3	
Mounting Data			
Fixing		Panel Mount - 18mm (3/4")	
Cable Data			
WiFi Cables	Cable Type	CS32 Flame Retardant to UN118.01 / EN6722 / EN45545-2	
	Diameter	5mm (0.2")	
	Length	2m (6')	
	Termination		
	Rev Pol SMA Plug	CM2-24-58-2RPSP	CM3-24-58-2RPSP
Right Angled N Plug	CM2-24-58-2RANP	CM3-24-58-2RANP	CM4-24-58-2RANP

† Peak gain simulated with all elements fed on 600x600mm ground plane excluding cable loss

* Typical Isolation and VSWR stated as measured with 0.5m (1.5') of cable


**When installed in accordance with SW3-996

Ultra Low Profile MiMo WiFi Antenna

CM[X]-24-58-2[VAR]


Electrical Data

Typical VSWR - Elements 1-[3]4*

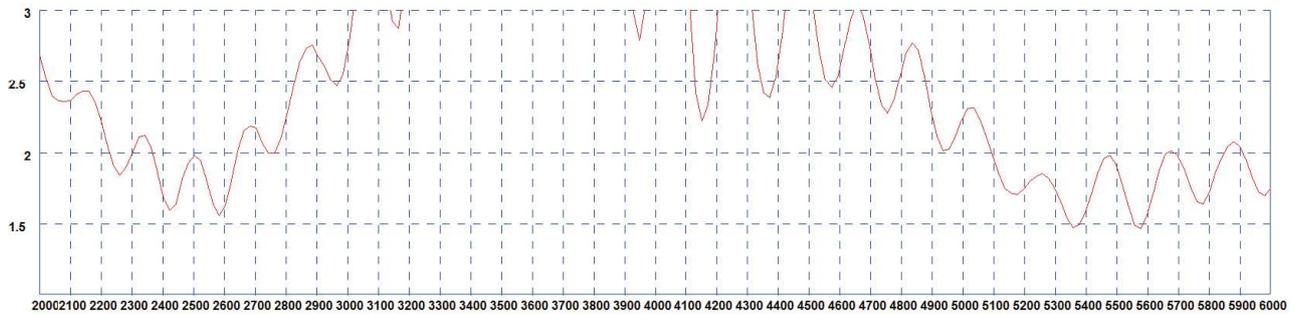

* VSWR measured with 0.5m (1.5') of CS32 cable


Typical Isolation - Elements 1-[3]4*

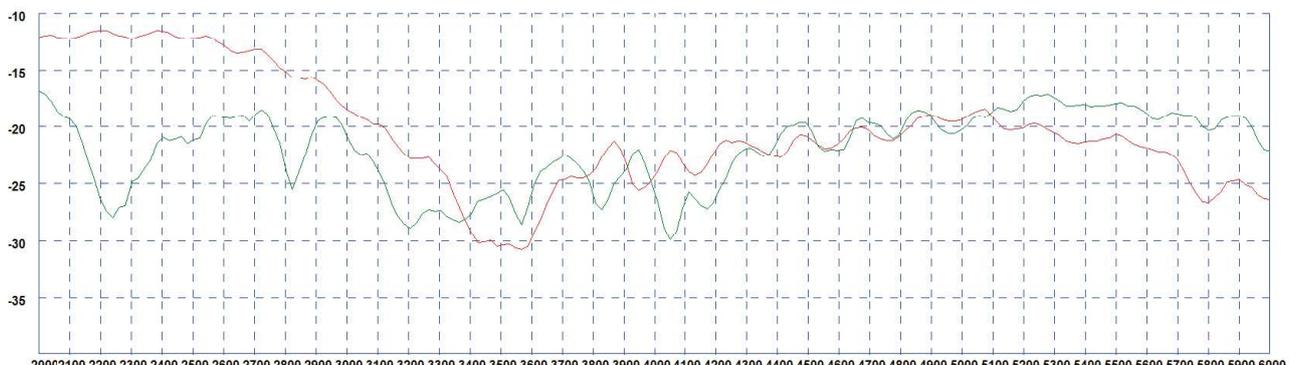


*Isolation measured with 0.5m (1.5') of CS32 cable Red Plot = Adjacent Elements Green Plot =Opposite Elements

Pattern Data


Typical 3D Pattern CM4 Ground Plane (2450MHz)

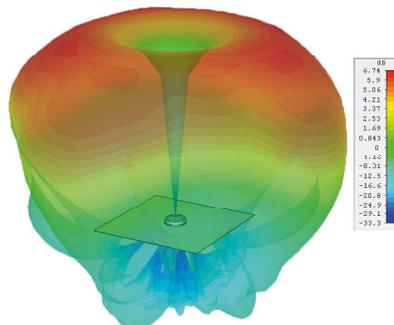

Typical 3D Pattern CM4 Ground Plane (5400MHz)

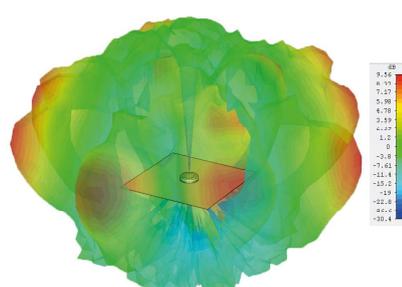

Typical 3D Pattern CM4 Free Space (2450MHz)

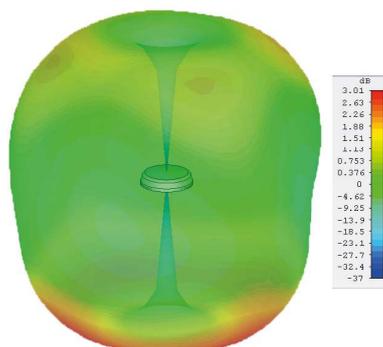

Typical 3D Pattern CM4 Free Space (5400MHz)

