

A55136TB, TBS

PRODUCT OVERVIEW

Mobile Mark's A55136TB is a premium heavy-duty P25/TETRA triband mobile antenna. It has an omni-directional pattern and it is vertically polarized for 50 Ohms impedance match.

This high quality, high performing antenna is specifically designed for public safety P25/TETRA triband mobile radios.

This antenna is manufactured using the finest corrosion resistant materials and finishes available. The enclosed silver plated phasing coil insures dependable operation.



The ABS base has an ultrasonically welded brass insert and a spring loaded contact for long term reliability.

This antenna mates with a standard NMO type mount, providing an excellent moisture seal even when the antenna is removed.

Specify A55136TB for option with Bullet. Specify A55136TBS for option with Shock Spring.

Visit our eStore to customize an Antenna Online.

Electrical Specifications	
Frequency/Gain	136-174 MHz 3 dBi (VHF) 380-520 MHz 5 dBi (UHF) 698-960 MHz 5 dBi (700/800/900bands)
VSWR	<2.25:1
Nominal Impedance	50 ohms
Maximum Power	200 Watts
Mechanical Specifications	
Radiator	Stainless Steel, Heavy Duty .125 dia.
Matching Coil	Silver plated, enclosed coil
Contact	Spring Loaded Contact
Length	21" (53.3 cm)
Mounting	A55136TB - Bullet Mount Option A55136TBS - Shock Spring Mount Option
Finish	Black

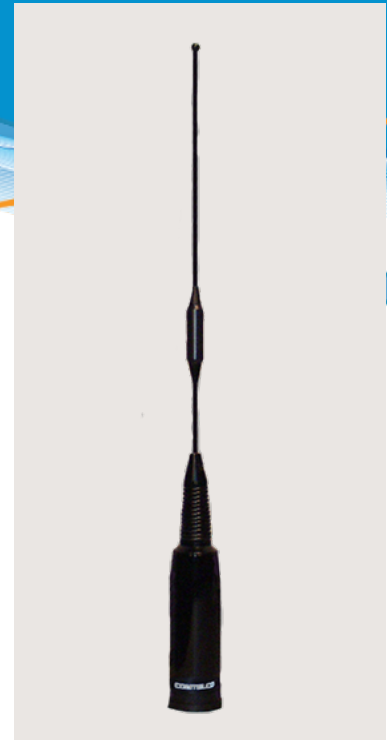

Tri-band P25 Mobile

A55136TB - Bullet Option

A55136TBS - Shock Spring Option

HIGHLIGHTS:

- P25 Triband Mobile
- Covers P25 VHF/UHF/7-960 MHz
- Made-in-the-USA
- Standard NMO Mount

COMMON APPLICATIONS:

- Law Enforcement
- Land Mobile Radio
- Public Safety

RELATED MODELS:

- A1845 SERIES
(Smaller Freq. Coverage, Whip)
- A1811WB (S)
(Lower Freq. Whip Style)



US Headquarters +1.847.671.6690
US/CA Toll Free +1.800.648.2800
European Facility +44.1543.459555

www.MobileMark.com