
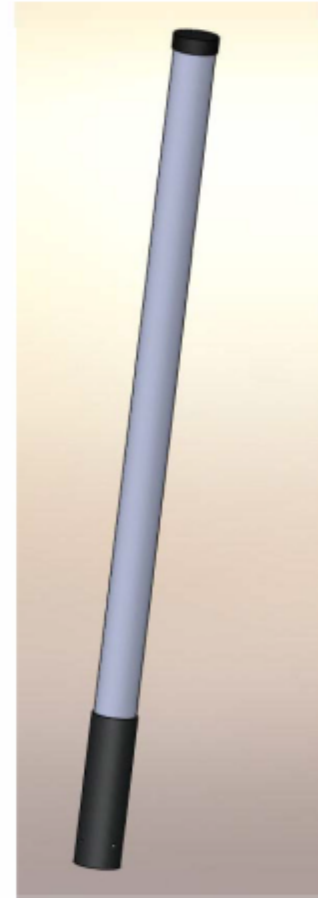


# BSLLL-150BB

**Omni Directional High Power Antenna**  
**2dB, 148-176 MHz**

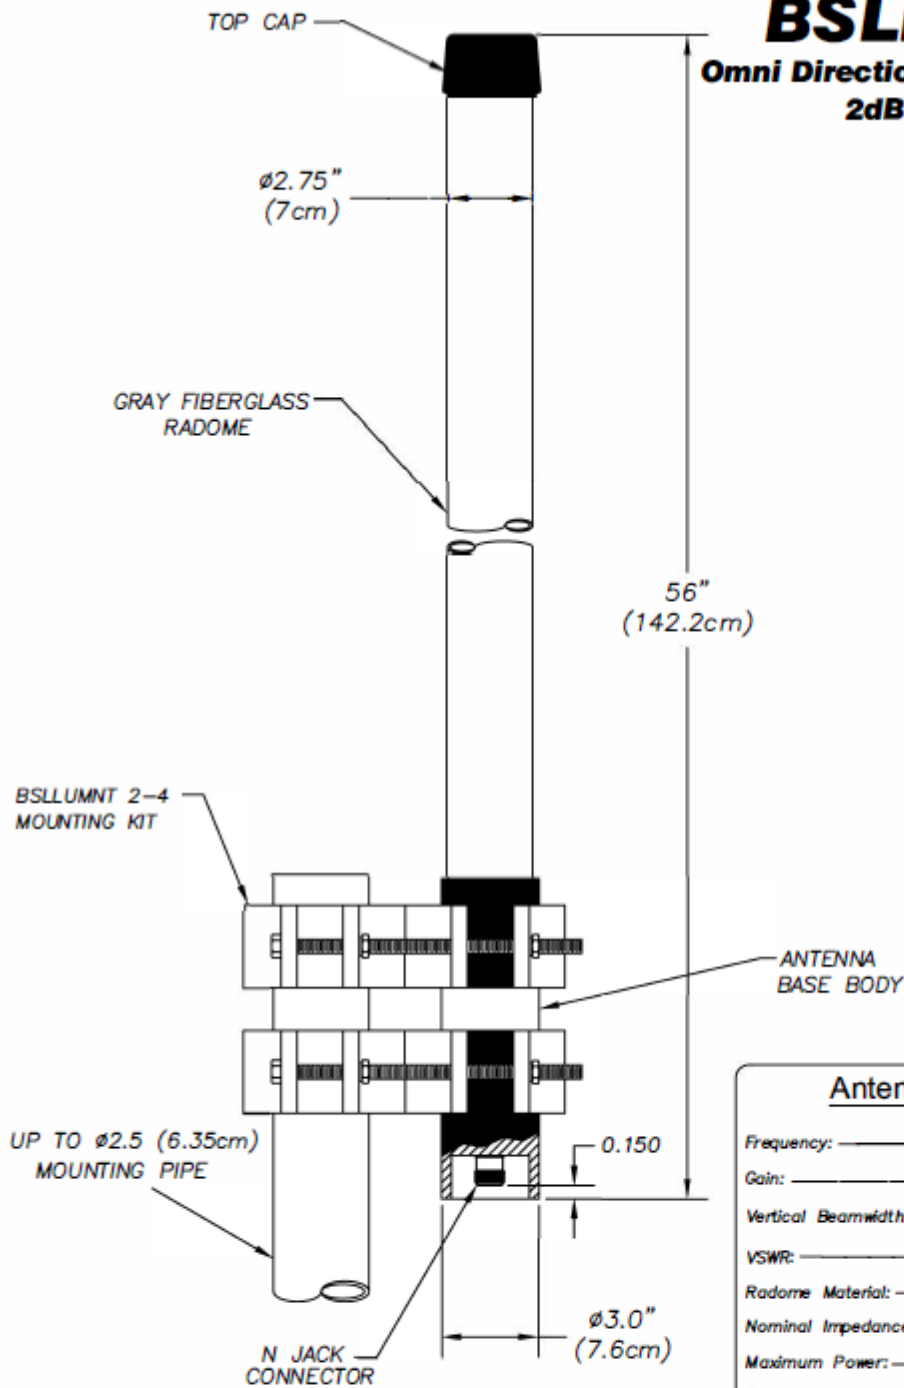

## Antenna Specifications:

Frequency:	148-176 MHz
Gain:	2dB
Vertical Beamwidth(-3 dB)	90°
VSWR:	<2:1
Radome Material:	Gray Fiberglass
Nominal Impedance:	50 OHM Nominal
Maximum Power:	500 Watts
Connectors:	N Jack
Lightening Protection:	External Recommended
Mount:	BSLLUMNT 2-4
	Mounts up to 2.5" (6.35cm) OD Pipe
Temperature:	-40C to +85C
Wind Survivability:	200 mph (322 kph) minimum

**MobileMark**  
antenna solutions



TC 4/18/10 B