

Specification

- Part No. : **OMB.915.B12F21**
- Product Name : Barracuda 915MHz 12dBi
Omnidirectional Outdoor Antenna
- Feature : Suitable to use in Robust Outdoor Environment
Dimensions: Height 2240mm
Connector: N Type Female
Wall and Pole Mount
RoHS Compliant



1. Introduction

The Barracuda OMB.915.B12F21 is a fiberglass omnidirectional outdoor antenna, operating in the 915MHz ISM band and is designed to offer long distance coverage. The antenna is designed for applications such as metering, industrial & environmental monitoring, remote asset monitoring and mesh network applications. The 915MHz band is one of the most widely used license free ISM bands. Typical applications are in SigFox, LoRa and LPWA networks.


With a 12dBi peak gain, the OMB.915.B12F21 omnidirectional antenna radiates uniformly in the azimuth. This collinear design characteristic provides the best performance, giving optimized coverage and therefore longer range in the horizontal plane over 360 degrees, thus minimizing the amount of nodes needed for a mesh network. The UV resistant fiberglass housing enables the OMB antenna to be utilized in all kinds of harsh environments making it more robust and safer than traditional whip antennas. It can be connected directly to the access point or telemetry unit or can be mounted on wall or device surface via the N-type connector and a pole-mount and wall-mount bracket is included.

2. Specification


ELECTRICAL	
Standard	ISM 915
Band	902~928MHz
Antenna Type	Collinear
Peak Gain	11.7dBi
Polarization	Vertical
Impedance	50 ohms
Max Input Power	200 watts
VSWR	<2:1
Radiation	Omnidirectional
Vertical Beam-width	12 Deg
Horizontal Beam-width	360 Deg
Antenna Design	Dipole Array
Internal Material	Copper
Connector	N Type Female
MECHANICAL	
Length	2240mm(Max)
Bracket Dimension	70*73mm(Max)
Radome Diameter	24mm
Antenna Weight (G.W)	994g
Mounting Accessories (G.W)	70g
Application	Indoor/Outdoor
Radome Material	White Fiberglass
Base Material	Aluminum
Mount Style	Pole Mount(35mm~50mm)/Wall Mount
Mounting	Stainless Steel
Wind Resistance	>150mph(>241km/h)
ENVIRONMENTAL	
Storage Temperature	-40°C to +80°C
Operating Temperature	-40°C to +60°C
Operating Humidity	10%~90% non-condensing
Storage Humidity	5%~90% non-condensing

3. Antenna Characteristics


3.1. Return Loss (dB)

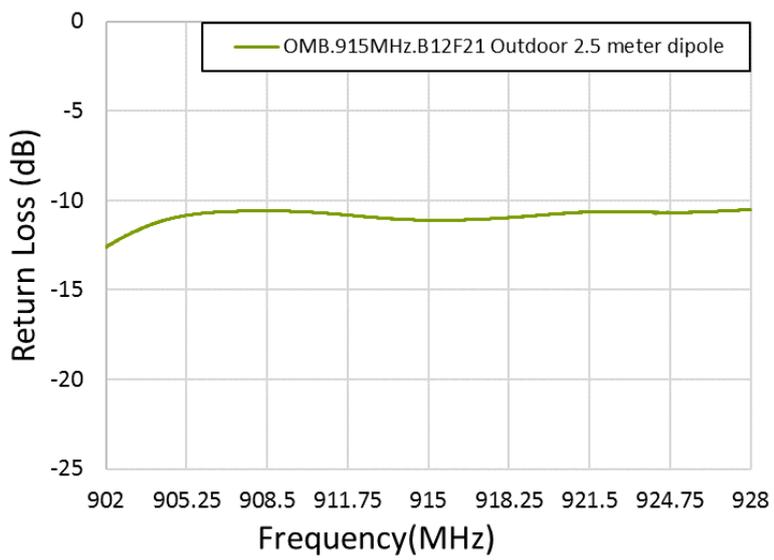

3.2. VSWR

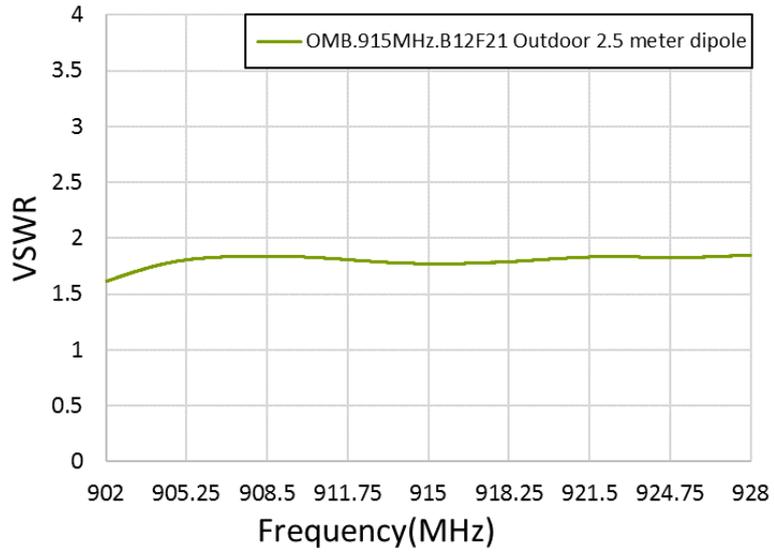


3.3. Gain (dBi)

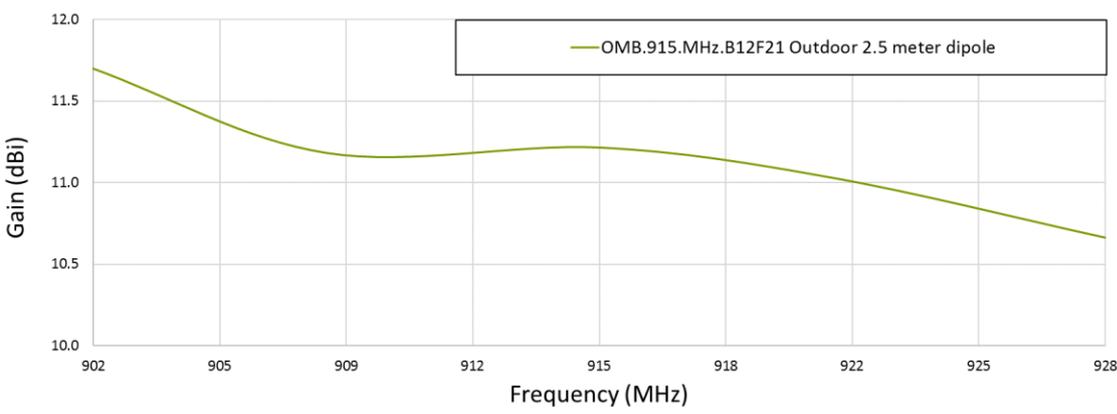


4. 2D Radiation Pattern

4.1. Azimuth (dBi)

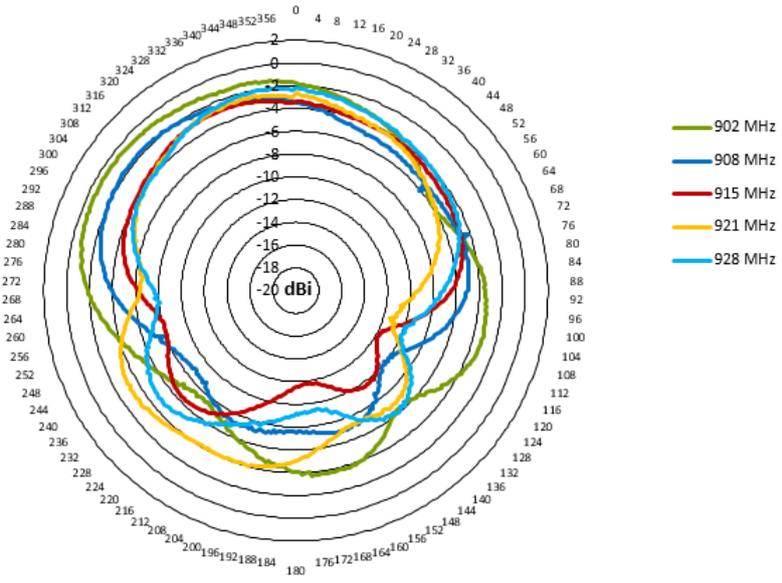


4.2. Elevation (dBi)

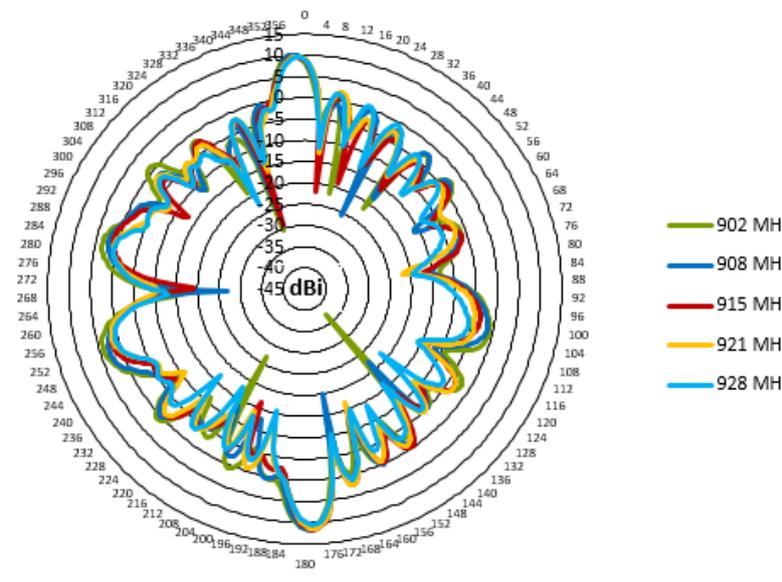


6. Packaging


1 OMB.915.B12.F21 per tube
Tube Dimensions - $\varnothing 80\text{mm}$ *Height 2300mm
Total Weight - 1800g

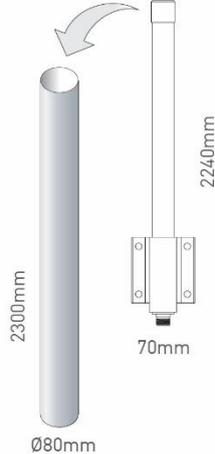

10 tubes per carton
Carton Dimensions - 2310*410*190mm
Weight - 20.8Kg

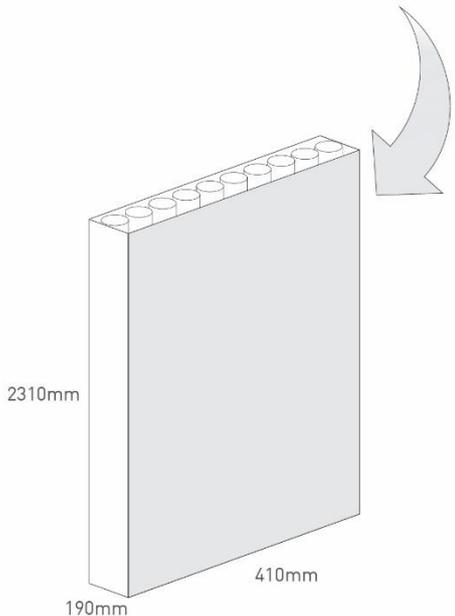

7. Antenna Installation Guide

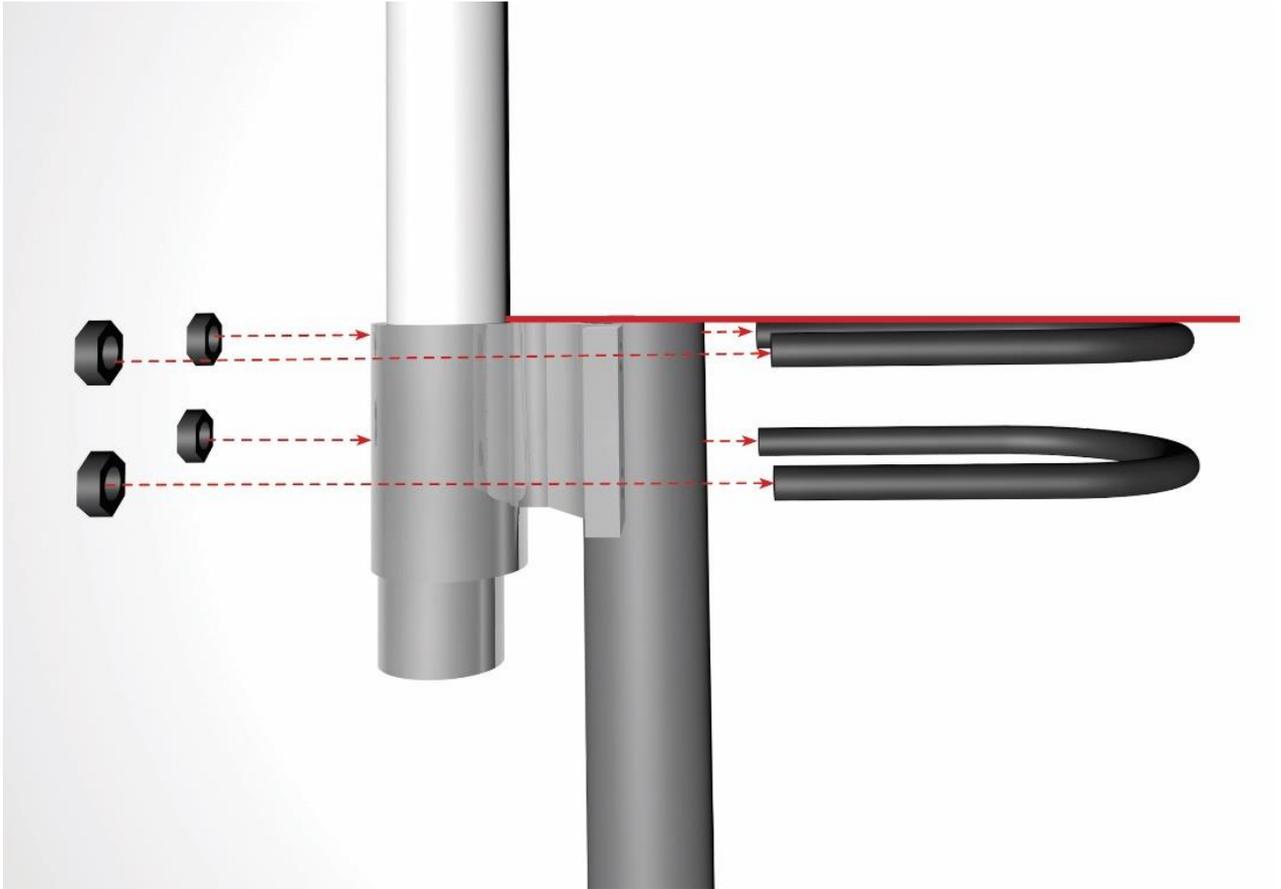

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd