

IPC970 NEW


Industrial System with LGA1200 Socket 10th Gen Intel® Xeon® or Core™ i7/i5/i3 Processor, Intel® W480E, Front-access I/O, and PCIe Slots

Features

- 10th Gen Intel® Xeon® or Core™ i7/i5/i3 processor, up to 80W
- Intel® W480E chipset
- Supports NVIDIA® GeForce RTX 3090 graphics card
- Supports M.2 Key B slot for 5G wireless connection
- Supports M.2 Key E slot for Wi-Fi connection
- Supports power-on delay function
- Supports TPM 2.0
- Supports Intel® AMT



▲ Rear view

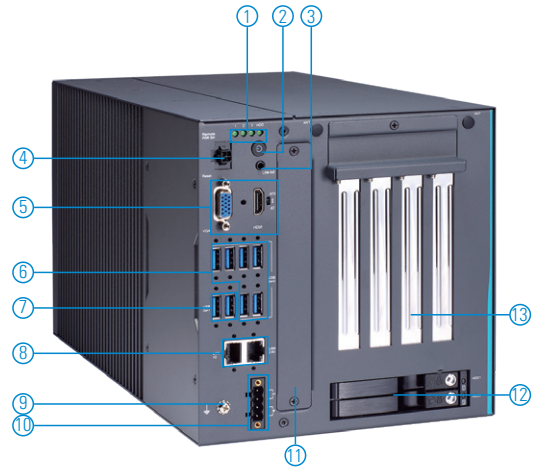

- | | |
|--|--------------------------------|
| 1. 1 x HDD/SSD access LED & 3 x user's LED | 10. 4-pin terminal block |
| 2. Power on/off button w/LED | 11. Flexible system I/O window |
| 3. Line-out | (1) AX93511 |
| 4. Remote power switch & reset switch | (2) AX93512 |
| 5. VGA, HDMI & AT/ATX selectable switch | (3) AX93516 |
| 6. 6 x USB 3.2 Gen.2 | (4) AX93519 |
| 7. 2 x USB 3.2 Gen.1 | (5) Blank I/O cover |
| 8. 2 x LAN | 12. 2 x 2.5" SSD/HDD bay |
| 9. Ground terminal | 13. Expansion slots |



Specifications

| | | |
|------------------|--|--|
| Standard Color | Sliver black | |
| Construction | Aluminum extrusion heavy-duty cold-rolled steel | |
| Processor System | CPU Level | 10th Gen Intel® Xeon® and Core™ i7/i5/i3 processors (Cometlake-S), up to 80W* |
| | Chipset | Intel® W480E |
| System Memory | 4 x DDR4-2933 MT/s ECC or non ECC U-DIMM socket, up to 128GB | |
| System I/O | Ethernet | 1 x Intel® 2.5 Gigabit LAN (Intel® I225-LM) 1 x Intel® Gigabit LAN (Intel® I219-LM) |
| | USB | 6 x USB 3.2 Gen.2 (10G) 2 x USB 3.2 Gen.1 1 x USB 2.0 (internal, 180D type A for license key) |
| | Display | 1 x VGA 1920 x 1200 resolution 1 x HDMI 4096 x 2304 @30Hz |
| | Audio | 1 x Line-out |
| | Others | 1 x Power on/off button with LED (ATX) 1 x Remote power switch 1 x AT/ATX selectable switch (default ATX mode) 1 x 4-pin terminal block |
| | Flexible System I/O window | AX93511 4 x RS-232/422/485 module (default RS-232) AX93512 2 x RS-232/422/485 with isolated 1.5kVDC & 8-in/8-out with isolated 1.5kVDC DIO module AX93516 4 x RS-232/422/485 with isolated 2kVDC module AX93519 1 x 10/100/1000 Mbps (Intel® I211-AT) Ethernet, 2 x RS-232/422/485 and 2 x USB 3.0 (USB 2.0 signal) module Blank I/O cover |
| TPM | TPM 2.0 | |

| | |
|-----------------------|--|
| Expansion Interface | Slot 1-2: PCIe x8 (x4 signal) |
| | Slot 3: PCIe x16 |
| | Slot 4: blank |
| | 1 x Full-size PCI Express Mini Card slot with SIM slot (USB & PCIe interface) 1 x M.2 Key E 2234 socket 1 x M.2 Key B 3042/3050 socket with SIM slot |
| Storage | 2 x SSD/HDD drive bay (7/9.5mm height, external) 1 x SSD/HDD drive bay (optional, 7/9.5/15mm height, internal) (supports RAID 0,1) 1 x M.2 Key M 2280 socket (PCIe Gen3 x4) for NVMe SSD |
| System Indicators | 1 x HDD/SSD access LED 3 x User's LED |
| Power Input | Type: ATX/AT Input: 24 VDC (uMin=19V/uMax=30V) |
| Operating Temperature | -10°C to +60°C (+14°F up to +140°F) with W.T. HDD/SSD* |
| Storage Temperature | -20°C to +80°C (-4°F to +176°F) |
| Humidity | 10% to 90%, non-condensing |
| Dimensions | 190 mm (7.48") (W) x 192 mm (7.55") (H) x 360 mm (14.17") (D) |
| Weight (net/gross) | 9.8 kg/7.3 kg |
| Certifications | CE |
| EOS Support | Windows 10, Linux |
| Software Support | AXView |

*Please refer to the user's manual for the system CPU support list and the system operating temperature list.

Ordering Information

| System | |
|---------------------------------------|--|
| IPC970-10W-F5E1A (P/N: E26G970102) | Industrial system with Intel® W480 PCH, blank flexible I/O cover, and 3 PCIe slots, w/o Axiomtek logo |
| Flexible System I/O Module | |
| AX93511 (P/N: 8816G974EA0E) | 4 x RS-232/422/485 module (default RS-232) |
| AX93512 (P/N: 8816G974FA0E) | 2 x RS-232/422/485 with isolated 1.5kVDC & 8-in/8-out with isolated 1.5kVDC DIO module |
| AX93516 (P/N: 8816G974GA0E) | 4 x RS-232/422/485 with isolated 2kVDC module |
| AX93519 (P/N: 8816G974HA0E) | 1 x 10/100/1000 Mbps (Intel® I211-AT) Ethernet, 2 x RS-232/422/485 & 2 x USB 3.0 (USB 2.0 signal) module |

| Optional Accessory | |
|--------------------------------------|------------------------------|
| 2.5" SATA HDD/SSD | |
| DDR4-2933 MT/s ECC or non ECC U-DIMM | |
| 8816G9702A0E | External fan module kit |
| 8816G9704A0E | Wall mount bracket kit |
| 8816G9703A0E | Internal SSD/HDD bracket kit |
| 886G9701CA0E | Memory holder bracket |

Power Protection

| DC Version |
|-------------------------------|
| OVP (over voltage protection) |
| OCP (over current protection) |
| Reverse Protection |

Packing List

- 1 x IPC970 unit
- 1 x Screw pack
- 4 x Foot pad
- 1 x CPU grease
- 1 x Terminal block
- 1 x Remote power switch cable
- 1 x Extension holder bracket kit
- 1 x HDD spacer
- 2 x graphics card power cable
- 1 x NVMe SSD bracket kit

Dimensions

