

1-Line Ethernet Lightning Protector

User's Guide

Version 0.93

Trademarks

Contents are subject to revision without prior notice.
All other trademarks remain the property of their owners.

Copyright Statement

This publication may not be reproduced as a whole or in part, in any way whatsoever unless prior consent has been obtained.

1. Checklist

The package should contain the following items:

- 1-Line Ethernet Lightning Protector
- User's Guide

Please notify your sales representative immediately if any items are missing or damaged.

2. Overview

The compact 1-Line Ethernet Lightning Protector can prevent your connected Ethernet devices such as hubs, switches, or end devices such as PCs from sudden lightning strikes. It supports Fast Ethernet or Gigabit Ethernet networks. The implementation installation is easy and no configuration is necessary for the 1-Line Ethernet Lightning Protector. Furthermore, it can be placed in a flat desk or fixed on the wall depending on your site plan. Other major features or benefits include the following:

- Comply with 10/700uS 6KV common mode lightning surge test
- Provide 1-line Ethernet lightning protection
- Support Fast or Gigabit Ethernet.
- 1 Port RJ-45 for Ethernet Signal input
- 1 Port RJ-45 for Ethernet Signal output
- Dimensions: 70 (W) x 25 (D) x 25 (H) mm

3. Safety Precautions

- The 1-Line Ethernet Lightning Protector is used for Ethernet devices only with RJ-45 connectors. Do not attempt to connect other devices with different connectors.
- Before connecting Ethernet devices to the 1-Line Ethernet Lightning Protector, make sure all power connections of your protected devices are switched off.
- Make sure the 1-Line Ethernet Lightning Protector is securely grounded. This allows excess current to flow to ground.

4. Installation

- Switch off all power connections to Ethernet devices to be protected.
- Connect the cable from external side with RJ-45 connector to the RJ-45 port marked "Ext" (Figure 1).
- Connect the cable from internal side with RJ-45 connector to the RJ-45 port marked "PC" (Figure 1).
- Connect the ground wire
- Switch on power connections to Ethernet devices to be protected.

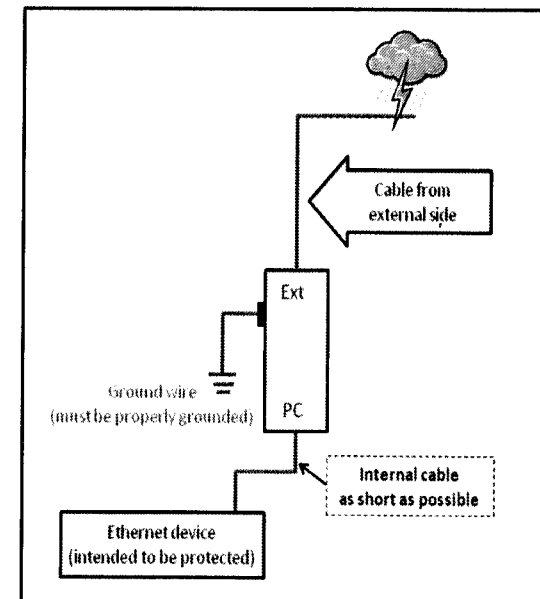


Figure 1. Lightning Protector connection cables

5. Model Name & Specification

Model Name:

- 1-line Fast Ethernet Lightning Protector
- 1-line Fast/Gigabit Ethernet Lightning Protector