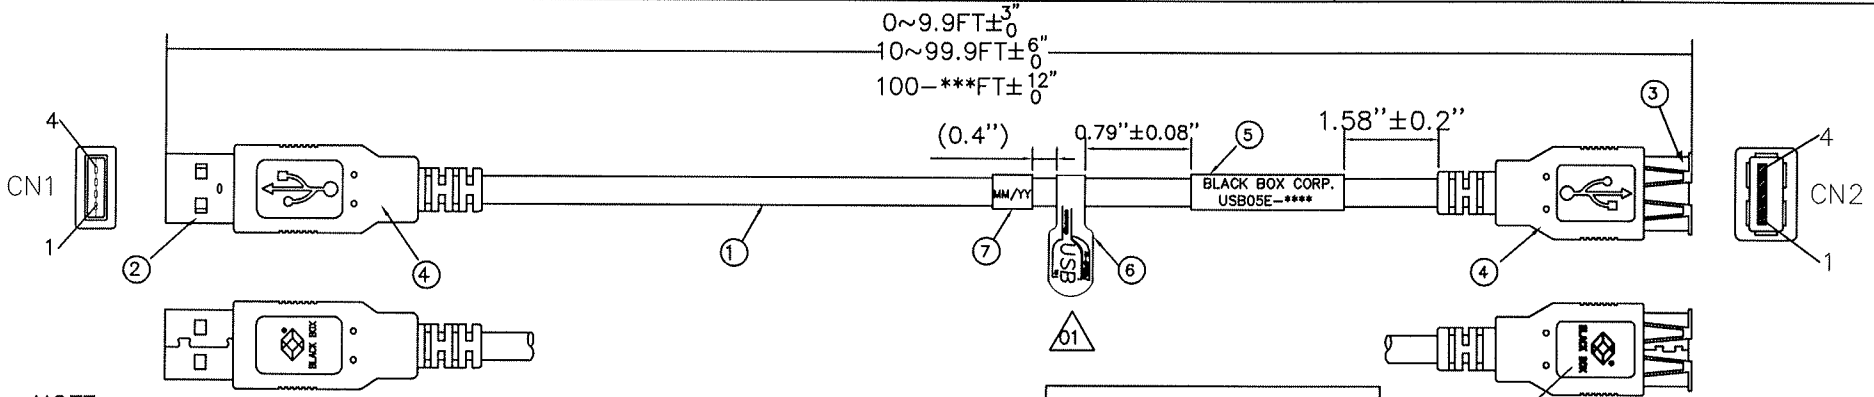

NOTE:

1.CABLE: UL2725 28AWG*1PR+22AWG*2C+AEB 65%
COLOR: BLACK OD: 5.0MM
CABLE: 5M≥L>3M UL2725 (25AWG*1PR+M)+20AWG*2C+MAEB 65%
COLOR: BLACK OD: 0.21"
MARKING: BLACK BOX CORPORATION GUARANTEED FOR LIFE
(724) 746-5500 --- USB CABLE ---
AWM E223178 STYLE 2725 VW-1 60℃ 30V USB Revision 2.0

2.CONNECTOR: USB A TYPE MALE SOLDER TYPE NICKEL PLATED SHELL

3.CONNECTOR: USB A TYPE FEMALE SOLDCR TYPE NICKEL PLATED SHELL

4.MOLDED PVC COLOR: BLACK

5.LABEL: BLACK BOX P/N LABEL

6.LABEL: USB LABEL

7.LABEL: YEAR MONTH LABEL

ELECTRONIC TEST:
A.OPEN/SHORT/INTERMITTENCE: 100%.
B.HI-POT: 300V DC/sec
C.INSULATION RESISTANCE: 20M ohm (MIN)
D.CONDUCTIVE RESISTANCE: 0<L≤10FT 2 ohm (MAX)
10FT<L≤15FT 3 ohm (MAX)
15FT<L≤30FT 4 ohm (MAX)
30FT<L≤100FT 6 ohm (MAX)
L>100FT 10 ohm (MAX)

BLACK BOX

BLACK BOX LOGO

BBOX P/N:	LENGTH
USB05E-0003	3FT
USB05E-0006	6FT
USB05E-0010	10FT

PIN OUT

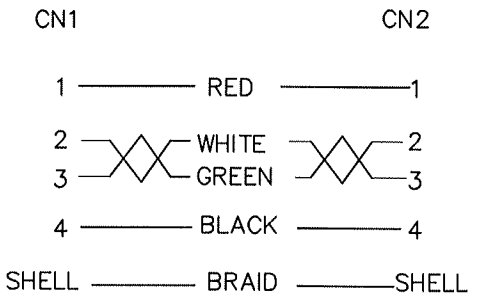

REV	ECN NO	DESCRIPTION	APPD.	DATE

BLACK BOX

Tolerance: X. ± .X ± .XX ± .XXX ± Angle: X° ± .X° ±	Approved by:	
	Checked by:	BLACK BOX P/N: USB05E-****
	Drawn by: xiong	Description: USB 2.0 CABLE TYPE"A"MALE -TYPE"B"FEMALE
	Date: 11.10.22	DWG. NO: RFS-92081516
	Scale: Unit:inch	SHEET: 1 OF 4 REV: 07